

Video Pattern Generator

MODEL 2234

Key Features:

- Support multimedia audio / video play formats
- Support up to 1080p high definition resolution
- Multi ports independent output test application
 - HDMI port output x 3
 - DisplayPort output x 2
 - SCART port x 2 (output x 1 / input x 1)
- DisplayPort V1.1a pixel rate 270MHz
- DisplayPort supports HDCP V1.3
- Support automatically & manually setting for DisplayPort function
 - 2 Link rate (1.62 / 2.7Gbps) selectable
 - 1, 2, 4 Video lane selectable
 - 0 / 3.5 / 6 / 9.5dB pre-emphasis selectable
 - 400 / 600 / 800 / 1200mV swing level selectable
- Support HDMI V1.3C (with 24, 30, 36bit color depth / xvYCC / CEC / Lip Sync)
- Support dual HDCP in DVI test application
- HDCP supports auto / manual mode
- HDMI and DisplayPort multiplexer function or switching for independent output
- HDCP ON/OFF in DVI, HDMI & DisplayPort interface
- Y, Pb, Pr / Y, Cb, Cr / Y, R-Y, B-Y output
- S-Video / CVBS / SCART / RGB / Color Component / D-terminal
- NTSC / PAL / SECAM signals
- EDID read / write / compare
- Optical / coaxial audio input (SPDIF)
- Scrolling pattern support
- Built-in China HD standard test patterns
- HDMI / DVI hot plug function



VIDEO PATTERN GENERATOR MODEL 2234

In order to perform motion pictures on the displays nowadays, the 2234 Video Pattern Generator has integrated the Multi-Media playback technology to provide versatile motion pictures for display quality evaluation test. It has high resolution test quality and multiple outputs support that can meet the requirements for multimedia video tests such as LCD Monitor / LCD TV / PDP / Projector of today and in the future.

This Video Pattern Generator provides both analog and digital signals, also supports multiple ports for independent output test and multimedia audio/video formats for play application. For the digital signal, the pixel rate of TMDS output is up to 330MHz and the test screen resolution is able to support beyond WQUXGA. Moreover, to cope with the higher frequency signal test for DVI Dual HDCP tests, it also supports dual link DVI test application.

Chroma 2234 has built in the up to date high resolution multimedia digital video transmission interface, HDMI V1.3, to provide high speed bandwidth and color depth. It supports 24, 30, 36 bits (RGB or YCbCr) and new color standard xvYCC along with sYCC, Adobe RGB, and Adobe YCC(CEA-861E) to implement the real natural colors and high resolution images.

DisplayPort is the state-of-the-art video output interface defined by VESA. The signal transmission is mainly composed of main channel, AUX CH and hot plug (HPD) 3 types of signals. The main channel is formed by 4 lanes (1, 2, 4 Lane) and each lane can support 2.7Gbps or 1.62Gbps transmission rate. Up to 10.8Gbps can be transmitted by 4 lanes. Chroma 2234 supports the DisplayPort standard formats with the following key features:

DPCD (DisplayPort Configuration Data) is the main function of DisplayPort that acted as a

communication bridge between source and sink. Chroma 2234 is able to adjust the parameters such as Lane, Main link rate and etc. automatically or manually after connection. As the signal attenuation may occur during long distance transmission for DisplayPort, the Pre-emphasis and Swing voltage can also be adjusted.

In addition Chroma 2234 supports SSC (Spread Spectrum Clock, the technology to eliminate EMI) test that can significantly reduce the EMI problems occurred among displays and components, and simplify the product design.

For the application of multiple tests, Chroma 2234 supports a variety of audio/video and pattern file formats for play with the resolution up to 1080p. Meanwhile, to fulfill the test application for multi ports output, 3 HDMI and 2 DisplayPorts of which the output settings can be executed separately have been built in to reduce a great deal of test time and finish the tests in the fastest way possible.

For operation, Chroma 2234 has adopted full color graphic interface and built in memory for storage with the diversified special test patterns like xvYCC, HDCP&E-EDID, 8/10/12bit deep color, CEC, Lipsync and China high definition test patterns embedded for use. Tests can be performed easily and rapidly to save the time and control the cost.


A remote controller (optional) can be used to replace the direct panel editing for flexible practice in a large test area. It is suitable for mass application in the production line. In addition, various timing parameters and test patterns can be edited via the VPG Master application on PC site. The easy operating interface and complete test functions of Chroma 2234 are applicable for all video and related industries in R&D, production test and quality assurance.



Chroma


PANEL DESCRIPTIONS

Front View

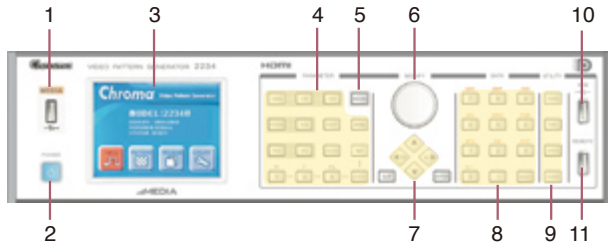

- | | | |
|---------------------|---------------------|--------------------------------|
| 1. Media USB Port | 6. Rotary Selector | 11. Remote for Chroma optional |
| 2. Power Switch | 7. Cursor | 12. SCART Input |
| 3. 3.5" LCD Display | 8. Data Group | 13. HDMI Output |
| 4. Function Group | 9. Utility | 14. SCART Output |
| 5. Media Play | 10. Device USB Port | 15. Smart I/O control |
| | | 16. CVBS : BNC, Y/C |

Rear View

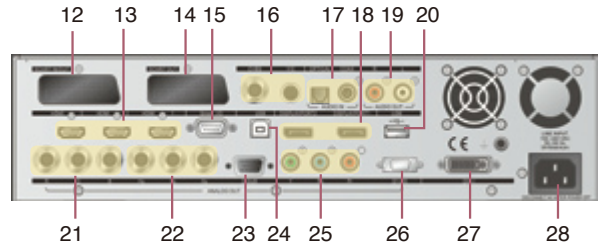

- | | |
|---|-----------------------------|
| 17. Digital Audio Input Optical & Coaxial | 23. RGB/D-SUB Analog Output |
| 18. DisplayPort Output | 24. Host USB port |
| 19. Analog Audio output : R/L | 25. YPbPr Component Output |
| 20. Device USB port | 26. D-Terminal (D1-D5) |
| 21. RGB/BNC Analog Output | 27. DVI-I Output |
| 22. Hs/Vs/Xs Sync Output | 28. AC Line Input |

SPECIFICATIONS

ANALOG OUTPUT	
Display Size	4096 x 2160
Pixel Rate Range	0.5~250MHz
Video Level	R,G,B (75 ohms) 0~1.0V programmable
Sync on Green/Level	0~0.5V On/Off programmable
White Level	0~1.2V programmable
Black Level	7.5 IRE / 0 IRE selectable

HORIZONTAL TIMING	
Total Pixels	32~8192 pixels / 1 pixels resolution

VERTICAL TIMING	
Total Pixels	4~4096 lines (non-interlace) 4~2048 lines (interlace) / 1 line programmable

COMPOSITE SYNC	
	H+V, H EXOR V, Equalization & Serration Pulse

SEPARATE SYNC	
	BNC : Hs,Vs,Xs ; D-SUB : Hs(Xs), Vs

VIDEO FORMAT	
Video Output	R, G, B / RS-343A Y, R-Y, B-Y Y, Cb, Cr / ITU 601 Y, Pb, Pr / ITU 709, RP177, SMPTE 240M DDC II B (D-SUB)

DVI (TMDS) OUTPUT	
Pixel Rate Range	25 < 1 link ≤ 165MHz/165 < 2 link ≤ 330MHz
EDID	Read / Write / Compare / Edit
HDCP	Support HDCP V.1.0 (with Dual Mode)
Compliant	DVI 1.0 specification
Video Signal Type	RGB
Sampling Mode	4:4:4

HDMI VIDEO OUTPUT	
Version	HDMI V1.3c (with 24,30,36 bit deep color/xvYCC/CEC/Lip sync)
Pixel Rate Range	25 ~ 165 MHz / TMDs CLK : 225MHz
Support HDMI Timing	77 Timing (CEA-861D)
Pixel Repetition	4
Video Signal Type	RGB or YCbCr
Sampling Mode	RGB 4:4:4 / YCbCr 4:4:4 or 4:2:2
Bits per Component	8 / 10 / 12 @ RGB & YCbCr
Color Space	RGB/ITU-R BT.601/ITU-R BT.709/xvYCC (IEC61966-2-4)/SYCC/Adobe RGB/Adobe YCC)
HDCP	HDCP V.1.2
EDID	Read / Write / Compare / Edit

HDMI AUDIO OUTPUT	
Sample Rate	32, 44.1, 48, 88.2, 96, 176.4, 192KHz
Number of Channel	8 Channel (FL/FR/LR/RR/FC/LFE/R/LC/R/R/C)
Bits per Sample	16 / 24 bit
Waveform	Sine wave
Amplitude	-90.3 to 0.0 dBFS / -138.4 to 0.0 dBFs
Frequency Range	10Hz to 20KHz
Frequency Resolution	10Hz / Step
External Audio Input	Optical and Coaxial (S/PDIF)
Special Control Mode	Tone / Sweep / Mute / Repeat / Play Time

DISPALYPORT OUTPUT	
Pixel Rate Range	25~270MHz
Video Signal Type	RGB/YCbCr
Sampling Mode	RGB 4:4:4 / YCbCr 4:4:4 or 4:2:2
Color Depth Transmission	6/8/10/12 bits per component

HDCP	HDCP V1.3
Main Link Data Rate	2.7Gbps or 1.62Gbps per lane
Lane Count	1/2/4 Lanes
Pre-emphasis	0dB/3.5dB/6dB/9.5dB selectable
Swing level	400mV/600mV/800mV/1200mV selectable
Audio	2 Channel (L-PCM)-Internal ; 8 Channel (AC3/DTS)-External
Bit Per Sample	24bit
Sample Rate	32, 44.1, 48, 88.2, 96, 176.4, 192KHz

TV OUTPUT	
Output Mode	NTSC PAL SECAM
Subcarrier Frequency	443 M,J BDGHI M 60 N Nc 4.41/4.25 MHz
Subcarrier Stability	±50 Hz

Video Output	Composite (BNC), S-Video Burst On/Off (NTSC, PAL) Contrast programmable Brightness programmable Saturation programmable Hue programmable
Closed Caption Support (NTSC)	C1, C2, C3, C4/ T1, T2, T3, T4

V-CHIP (NTSC)	MPPA Rating : G, PG, PG-13, R, NC-17, X FCC Rating : TV-Y, TV-Y7, TV-G, TV-PG, TV-14, TV-MA Canada English Rating : C, C8+, G, PG, 14+, 18+ Canada French Rating: G, 8ans+,13 ans+,16 ans+,18 ans+
Teletext (PAL)	Teletext System B Level 1 , 1.5

MULTIMEDIA PLAY	
Video Format	MPEG-1(.mpg, .dat) ; MPEG-2(.vob) MPEG-4(.avi, .mp4) ; Support Up to 40Mbps(1080p)
Audio Format	MPEG-1 Layer-3(.mp3) ; LPCM(.wav) ; AAC(.aac)
Picture Format	BitMap(.bmp) ; JPEG(.jpg)
Interface	USB 2.0
File system	Internal: EXT-3, External: EXT-3 / FAT-32
Storage method	Internal: 16GB Flash Memory, External: Media USB Port

DATA STORAGE DEVICE	
Default	2000 timings + 2000 patterns
Internal Memory	3000 timings + 3000 patterns + 1000 programs
External Memory	USB Host interface

OTHERS	
AC Input	100-240V, 50-60Hz, 5A maximum
Operation/Storage Temp.	+5~+40 deg.C / -20~+60 deg.C
Humidity	20~90 %

DIMENSION & WEIGHT	
2234	88 x 350 x 350 mm / 3.46 x 13.78 x 13.78 inch (HxWxD) 5.6 kg / 12.33 lbs

* All specifications are subject to change without notice.
* All other brand and logo are trademarks or registered trademarks of their respective holders.

ORDERING INFORMATION

2234 : Video Pattern Generator	A240001 : Remote Controller
A222906 : IR Controller	A240100 : USB Disk 1GB

Developed and Manufactured by :

CHROMA ATE INC.

致茂電子股份有限公司

HEADQUARTERS

66, Hwa-Ya 1st Rd., Hwa-Ya
Technology Park, Kuei-Shan
Hsiang, Taoyuan Hsien 333,
Taiwan

Tel: +886-3-327-9999

Fax: +886-3-327-8898

http://www.chromaate.com

E-mail: chroma@chroma.com.tw

CHINA

**CHROMA ELECTRONICS
(SHENZHEN) CO., LTD.**

8F, No.4, Nanyou Tian An
Industrial Estate, Shenzhen,
China PC: 518054

Tel: +86-755-2664-4598

Fax: +86-755-2641-9620

BEIJING BRANCH OFFICE

TEL : +86-10-6803-9350; 6803-9361

FAX : +86-10-6803-9852

SUZHOU BRANCH OFFICE

TEL : +86-512-6824-5425

FAX : +86-512-6824-0732

JAPAN

CHROMA JAPAN CORP.

11F NARA Building II 2-2-8
Shinyokohama, Kouhokoku,
Yokohama City 222-0033
Kanagawa, Japan

Tel: +81-45-470-2285

Fax: +81-45-470-2287

http://www.chroma.co.jp

U.S.A.

CHROMA ATE INC. (U.S.A.)

7 Chrysler Irvine, CA 92618
Tel: +1-949-421-0355
Fax: +1-949-421-0353
Toll Free: +1-800-478-2026

EUROPE

CHROMA ATE EUROPE B.V.

Morsestraat 32
NL-6716 AH Ede
The Netherlands
Tel: +31-318-648282
Fax: +31-318-648288