

*Model 3104C*

# **Biconical Antenna**

**User Manual**



 **ETS-LINDGREN**™  
An ESCO Technologies Company

ETS-Lindgren L.P. reserves the right to make changes to any product described herein in order to improve function, design, or for any other reason. Nothing contained herein shall constitute ETS-Lindgren L.P. assuming any liability whatsoever arising out of the application or use of any product or circuit described herein. ETS-Lindgren L.P. does not convey any license under its patent rights or the rights of others.

© Copyright 2000–2009 by ETS-Lindgren L.P. All Rights Reserved. No part of this document may be copied by any means without written permission from ETS-Lindgren L.P.

Trademarks used in this document: The *ETS-Lindgren* logo is a trademark of ETS-Lindgren L.P.

**Revision Record | MANUAL 3104C | Part #399034, Rev. F**




Revision	Description	Date
A–D	Initial Release; updates / edits	2000–2002
E	Updated <i>Specifications</i>	September, 2002
F	Updated <i>PX</i> branding; updated <i>Mounting Instructions</i> ; rebrand	February, 2009


## Table of Contents

<b>Notes, Cautions, and Warnings.....</b>	<b>v</b>	<input type="checkbox"/>
<b>1.0 Introduction .....</b>	<b>7</b>	<input type="checkbox"/>
Optional Items.....	7	<input type="checkbox"/>
Portable Elements (Model 3104CP) .....	7	<input type="checkbox"/>
Extended Portable Elements (Model 3104CPX) .....	8	<input type="checkbox"/>
Carrying Cases .....	8	<input type="checkbox"/>
Tripod Options .....	8	<input type="checkbox"/>
ETS-Lindgren Product Information Bulletin .....	9	<input type="checkbox"/>
<b>2.0 Maintenance .....</b>	<b>11</b>	<input type="checkbox"/>
Annual Calibration .....	11	<input type="checkbox"/>
Service Procedures .....	11	<input type="checkbox"/>
<b>3.0 Specifications.....</b>	<b>13</b>	<input type="checkbox"/>
Electrical Specifications .....	13	<input type="checkbox"/>
Physical Specifications .....	13	<input type="checkbox"/>
<b>4.0 Assembly Instructions .....</b>	<b>15</b>	<input type="checkbox"/>
<b>5.0 Mounting Instructions .....</b>	<b>17</b>	<input type="checkbox"/>
Using Included Mounting Adapters on a 4-TR.....	17	<input type="checkbox"/>
Additional Mounting Options.....	19	<input type="checkbox"/>
4-TR Mounting Options.....	19	<input type="checkbox"/>
7-TR and Mast Mounting Options.....	20	<input type="checkbox"/>
2x2 Boom Mounting Options .....	21	<input type="checkbox"/>
<b>6.0 Operation .....</b>	<b>23</b>	<input type="checkbox"/>
<b>7.0 Typical Data.....</b>	<b>25</b>	<input type="checkbox"/>
Model 3104C Antenna Factor .....	25	<input type="checkbox"/>
Model 3104C Gain .....	26	<input type="checkbox"/>
Model 3104C VSWR.....	27	<input type="checkbox"/>
Model 3104C Half-Power Beamwidth .....	28	<input type="checkbox"/>
Model 3104C Forward Power .....	29	<input type="checkbox"/>
@ 1 M—Derived from AF .....	29	<input type="checkbox"/>
@ 3 M—Derived from AF .....	30	<input type="checkbox"/>
@ 3M—Measured over Conducting Ground .....	31	<input type="checkbox"/>



Notes, Cautions, and Warnings

	<b>Note:</b> Denotes helpful information intended to provide tips for better use of the product.
	<b>Caution:</b> Denotes a hazard. Failure to follow instructions could result in minor personal injury and/or property damage. Included text gives proper procedures.
	<b>Warning:</b> Denotes a hazard. Failure to follow instructions could result in SEVERE personal injury and/or property damage. Included text gives proper procedures.

 See the ETS-Lindgren *Product Information Bulletin* for safety, regulatory, and other product marking information.

This page intentionally left blank.

## 1.0 Introduction

---

The **ETS-Lindgren Model 3104C Biconical Antenna** is designed to operate over the 20 MHz to 200 MHz frequency range to meet Military and Department of Defense EMI specifications. The Model 3104C is designed and precisely manufactured to conform to the requirements of MIL-STD-461 and other Military Standards as reflected in Drawing ES-F-201286.



The biconical elements are made from welded aluminum. The elements mount in a balun network fabricated of phenolic and equipped with the necessary impedance-matching components. The lightweight construction provides easy handling and storage.

Each antenna is individually calibrated during the manufacturing process. The results of these calibrations are included for use in specification compliance testing.

### Optional Items

---

#### PORTABLE ELEMENTS (MODEL 3104CP)

Collapsible folding elements are available, making the Model 3104C portable and ideal for field use. Both the standard rigid and optional folding elements attach to the balun using screw mounts. This makes changing between the two types of elements quick and easy.

## EXTENDED PORTABLE ELEMENTS (MODEL 3104CPX)

An extended version of the portable element is available. These folding elements are twice as long as the standard elements. The longer elements enable you to generate high fields at low frequencies with reduced applied power.

## CARRYING CASES

Carrying cases for biconical antennas and portable elements are available.

## TRIPOD OPTIONS

ETS-Lindgren offers the following nonmetallic, non-reflective tripods for use at both indoor and outdoor EMC test sites.

- **4-TR Tripod**—Constructed of linen phenolic and delrin, designed with an adjustable center post for precise height adjustments. Maximum height is 2.0 m (80.0 in), and minimum height is 94 cm (37.0 in). This tripod can support up to an 11.8 kg (26.0 lb) load.





- **7-TR Tripod**—Constructed of PVC and fiberglass components, providing increased stability for physically large antennas. The unique design allows for quick assembly, disassembly, and convenient storage. Allows several different configurations, including options for manual or pneumatic polarization. Quick height adjustment and locking wheels provide ease of use during testing. Maximum height is 2.17 m (85.8 in), with a minimum height of .8 m (31.8 in). This tripod can support a 13.5 kg (30 lb) load.



### **ETS-Lindgren Product Information Bulletin**

---

See the ETS-Lindgren *Product Information Bulletin* included with your shipment for the following:

- Warranty information
- Safety, regulatory, and other product marking information
- Steps to receive your shipment
- Steps to return a component for service
- ETS-Lindgren calibration service
- ETS-Lindgren contact information

This page intentionally left blank.

## 2.0 Maintenance

---

**CAUTION**

Before performing any maintenance, follow the safety information in the ETS-Lindgren *Product Information Bulletin* included with your shipment.



Maintenance of the Model 3104C is limited to external components such as cables or connectors.

If you have any questions concerning maintenance, contact ETS-Lindgren Customer Service.

### Annual Calibration

---

See the *Product Information Bulletin* included with your shipment for information on ETS-Lindgren calibration services.

### Service Procedures

---

For the steps to return a system or system component to ETS-Lindgren for service, see the *Product Information Bulletin* included with your shipment.

This page intentionally left blank.

### 3.0 Specifications

---

#### Electrical Specifications

---

Frequency Range:	20 MHz–200 MHz
Impedance:	Matched to 50 $\Omega$
VSWR Ratio (Average):	2.8:1
Power Input Capability:	<ul style="list-style-type: none"><li>• 50 Watts continuous power</li><li>• 100 Watts short-term peak power</li></ul>
Connector:	Type N

#### Physical Specifications

---

Length:	143.5 cm (56.5 in)
Depth:	81.3 cm (32 in)
Diameter:	53.3 cm (21 in)
Weight:	2.7 kg (6.0 lb)


This page intentionally left blank.

## 4.0 Assembly Instructions

---

### CAUTION


Before connecting any components, follow the safety information in the ETS-Lindgren *Product Information Bulletin* included with your shipment.

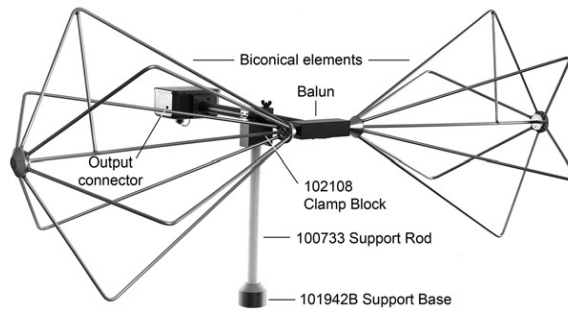

The Model 3104C Biconical Antenna is shipped unassembled, and includes these parts:

- Balun
- Biconical element (2)
- Belleville washer (2)
- 100733 Support Rod
- 101942B Support Base
- 102108 Clamp Block

To assemble the Model 3104C:

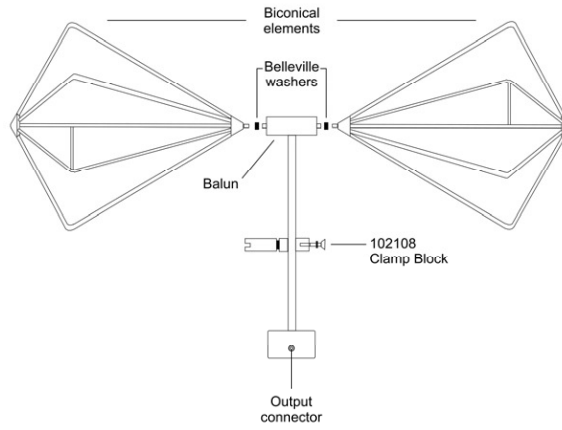

1. Slide a belleville washer onto the threaded screw end of one of the biconical elements.
2. Line up the screw threads with the receptacle hole on the balun and turn the biconical element until it is firmly secured in the balun.

**CAUTION**

**Do not cross thread this connection or permanent damage to the joint could occur.**

3. Repeat step 1 and step 2 using the remaining washer and biconical element.



## 5.0 Mounting Instructions

### CAUTION

Before connecting any components, follow the safety information in the ETS-Lindgren *Product Information Bulletin* included with your shipment.


### Using Included Mounting Adapters on a 4-TR

The Model 3104C ships with the following adapters, used to mount the antenna to a 4-TR tripod:

- **102108 Clamp Block**—Uses standard 7/8–14 threads and comes with a 1/4–20 thread adapter for mounting to an ETS-Lindgren tripod or most other tripods.

- **100733 Support Rod**

- **101942B Support Base**

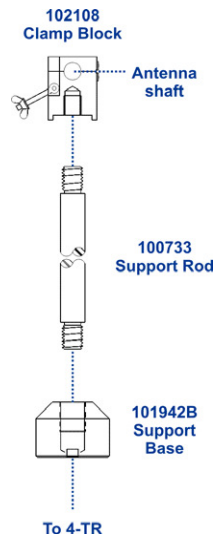


To use these adapters to mount the Model 3104C to a 4-TR tripod:

1. Assemble the clamp block, support base, and support rod.
2. Attach the support base to the 4-TR tripod.
3. Unscrew the clamp block latch and open the top.
4. Insert the shaft of the balun into the clamp block and close the top.
5. Move the latch to the closed position and tighten so the antenna is held securely.
6. Attach the cable to the output connector on the antenna.

## Additional Mounting Options

### 4-TR MOUNTING OPTIONS

Following are additional options for mounting the Model 3104C onto an ETS-Lindgren 4-TR Tripod. Contact the ETS-Lindgren Sales Department for information on ordering optional mounting hardware.

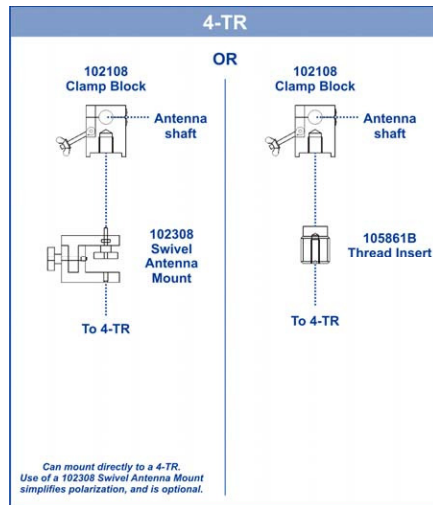

## 7-TR AND MAST MOUNTING OPTIONS

Following are options for mounting the Model 3104C onto an ETS-Lindgren 7-TR Tripod or mast.


Contact the ETS-Lindgren Sales Department for information on ordering optional mounting hardware.



*Mast* refers to 2070 Series, 2075, and 2175 Antenna Towers.

*7-TR* refers to 109042, 106328, and 108197 booms:

- *109042 boom*—Straight boom; for general antenna mounting on a 7-TR
- *106328 boom*—Offset boom; for general antenna mounting on a 7-TR with pneumatic or manual polarization
- *108197 boom*—Center rotate boom; for rear-mount stinger-type antennas only

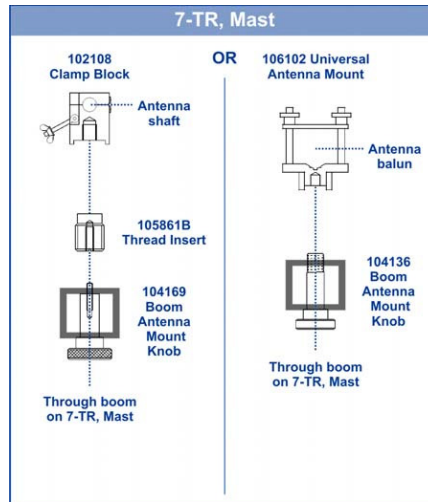


## 2x2 BOOM MOUNTING OPTIONS

Following are additional options for mounting the Model 3104C onto a 2x2 boom. Contact the ETS-Lindgren Sales Department for information on ordering optional mounting hardware.



2x2 boom refers to a typical 2-inch by 2-inch boom.

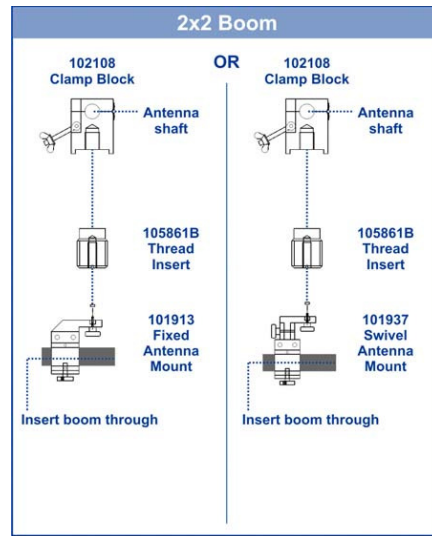

This page intentionally left blank.

## 6.0 Operation

---

The Model 3104C Biconical Antenna has a traditional coaxial wound balun that provides a broad frequency range and moderate gain for both transmitting and receiving. This antenna may be used for radiated immunity measurements provided that the peak input power is limited to no more than 100 W.


For enhanced measurement repeatability it is recommended that when the Model 3104C is used vertically the same element orientation be maintained from measurement to measurement. A white strip or dimples on the element block mark the coax shield side of the element. Keep this side towards ground when the antenna is used vertically to increase test repeatability, especially when the Model 3104C is used inside a shielded enclosure.


This page intentionally left blank.





7.0 Typical Data

Model 3104C Antenna Factor

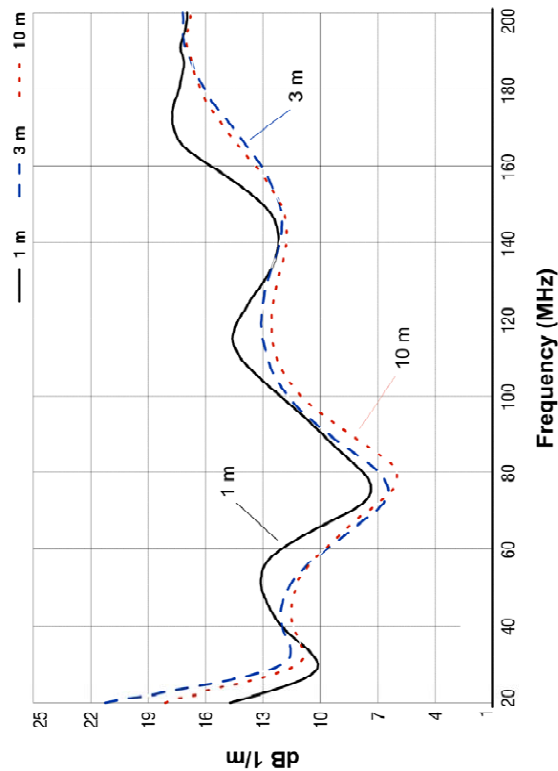


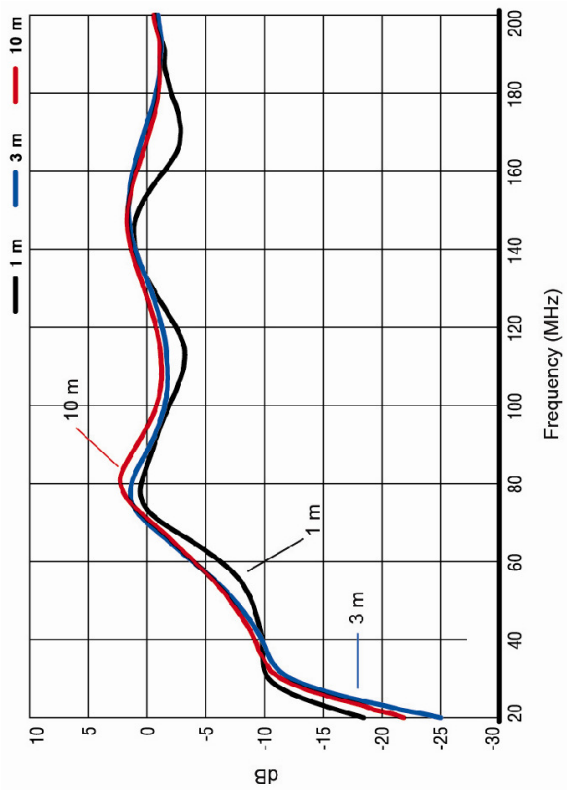


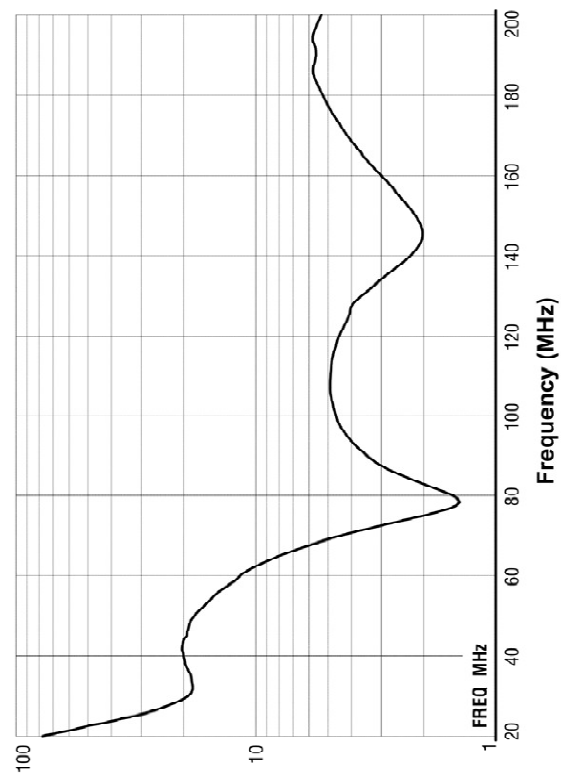

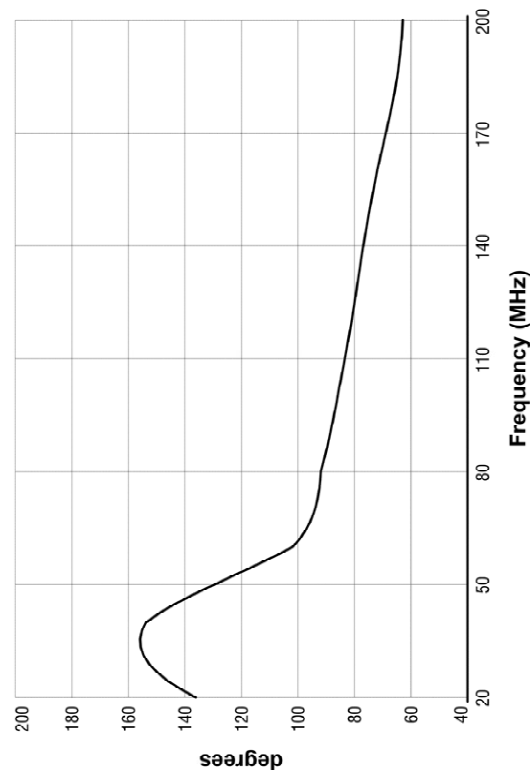


@ 1 M—DERIVED FROM AF

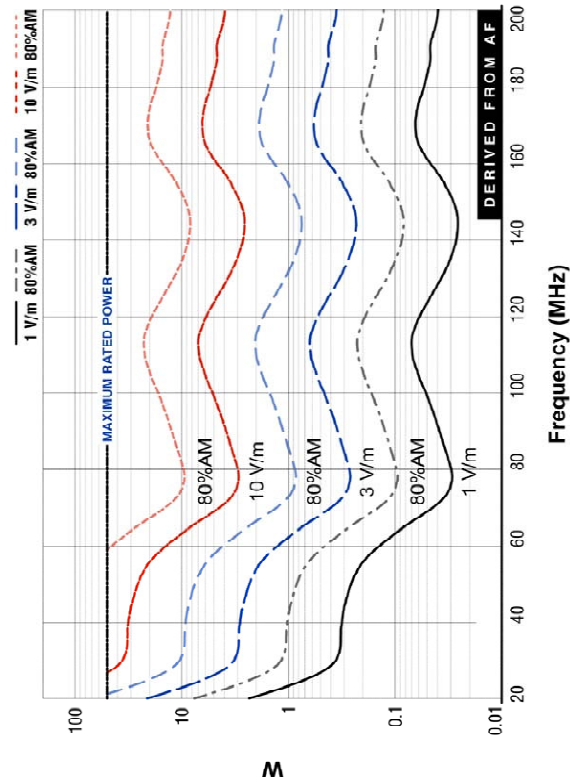

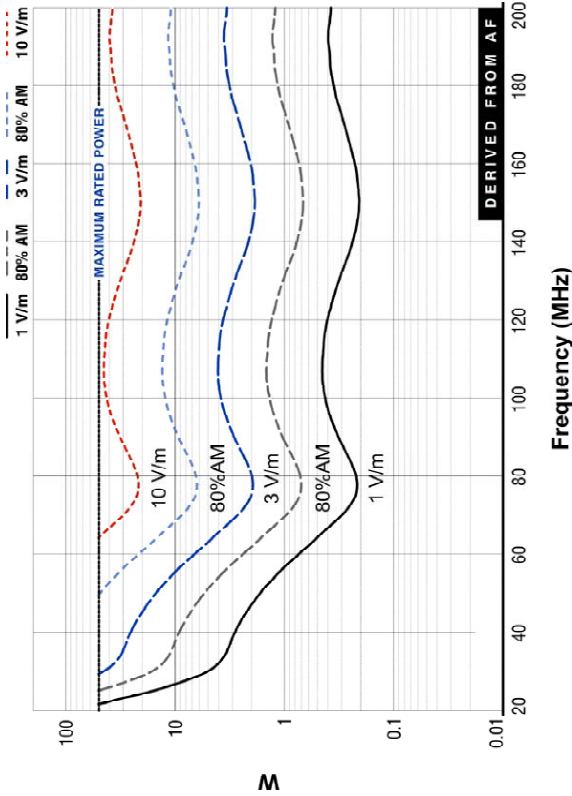

@ 3M—MEASURED OVER CONDUCTING GROUND

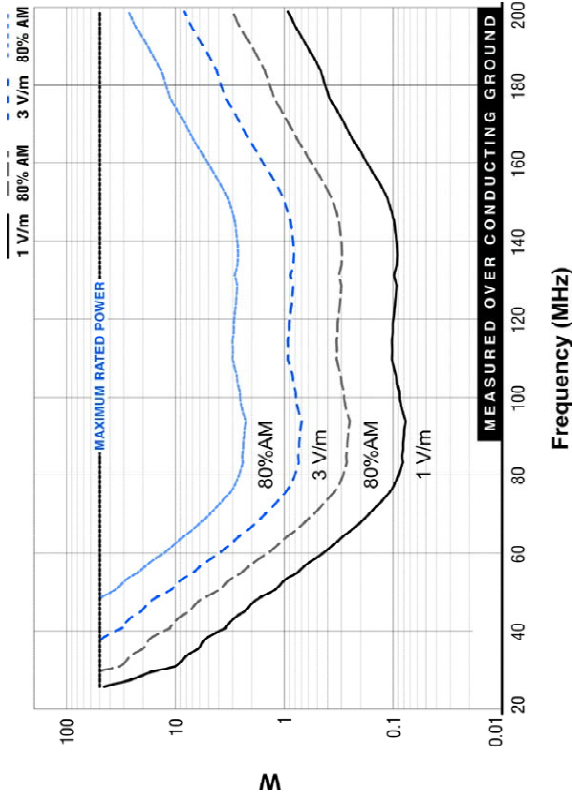

This page intentionally left blank.



Appendix A: Warranty



See the *Product Information Bulletin* included with your shipment for the complete ETS-Lindgren warranty for your Model 3104C.

DURATION OF WARRANTIES FOR MODEL 3104C

All product warranties, except the warranty of title, and all remedies for warranty failures are limited to two years.

Product Warranted	Duration of Warranty Period
Model 3104C Biconical Antenna	2 Years