

# ER8000

EMI Receiver with built-in LISN



## Main Features

- ER8000 Opt.00: 9 kHz to 30 MHz frequency range
- ER8000 Opt.01: 9 kHz to 3 GHz frequency range
- Compliant with CISPR 16-1-1, MIL-STD-461, ANSI C63.2 and FCC
- Compliant with CISPR 14-1 when in conjunction with CA0010
- Conducted and radiated emission tests
- Direct analog to digital conversion up to 30 MHz
- Combination of EMI test receiver and spectrum analyzer
- Operates gapless FFT
- Very fast measuring time
- Built-in Lines Impedance Stabilization Networks (LISN)
- User port for driving external LISNs and ancillaries
- Free PES PMM Emission Suite Software
- Robust, compact construction
- 140 dB $\mu$ V (2 W) maximum input level without damage

Extra compact, flexible and easy-to-use, ER8000 is a high performance, full CISPR 16-1-1 compliant EMI receiver perfect for any conducted and radiated measurement from 9 kHz up to 3 GHz.

A full compliant span as fast as two seconds in band B and as fast as one minute in bands C+D is the result of a state-of-the-art design featuring FFT architecture to optimize measurement speed.

Other technical improvements include an extremely effective front end with efficient preselector, for outstanding performance, and a user port suited for external devices like LISNs and switching boxes for even faster testing times.

The ER8000 also features an internal built-in 16 A LISN (Line Impedance Stabilization Network), so this compact setup can perform conducted emission measurement tests and characterize EUTs quickly and effectively, whether in the design lab during product development or in an EMC laboratory for the certification of EMI measurements. An optional DDA Click Analyzer makes this measurement system more attractive and profitable than ever.

The compact size and rugged yet lightweight design make the ER8000 the perfect solution for in-situ testing.

PMM Emission Suite software (included free of charge) is the ideal companion for this high performance receiver, featuring a full set of user-friendly functions for all EMI applications.


The receiver can be ordered with two different frequency ranges: 9 kHz to 30 MHz (ER8000 opt. 00), or 9 kHz to 3 GHz (ER8000 opt. 01). Users can upgrade from version opt. 00 to version opt. 01 at any time.

# ER8000

## EMI Receiver with built-in LISN

### SPECIFICATIONS

<b>Frequency range</b>	9 kHz to 30 MHz (Opt.00) 9 kHz to 3 GHz (Opt.01) 1 Hz; 100 Hz above 30 MHz				
Resolution	< 2.5 ppm				
Frequency accuracy	< 2.5 ppm				
<b>Spectrum method analysis</b>	FFT, size up to 8192, minimum overlap 89%				
<b>RF Input</b>	Zin 50 Ω, N fem.				
VSWR 10 dB RF att.	< 1.2; < 2 above 1 GHz				
0 dB RF att.	< 2				
Attenuator	0 dB to 45 dB (5 dB steps)				
Preamplifier gain	20 dB; 10 dB above 30 MHz Low saturation preamplifier (after preselector)				
Pulse limiter	Built in (selectable) below 30 MHz				
<b>Max input level</b> (without equipment damage)					
Sinewave AC	140 dBμV (2 W); 137 dBμV (1 W) above 30 MHz				
Voltage pulse spectral density	176 dBμV/MHz below 150 kHz; 130 dBμV/MHz below 30 MHz; 97 dBμV/MHz below 1 GHz				
Max. pulse voltage	200V (≤ 20 μs)				
Max. DC voltage	50V				
<b>Preselector</b> (permanent built-in)	(Seven BP filters - 15 MHz BW to ADC)				
	9 kHz to 150 kHz	30 MHz to 96.6 MHz tracking			
	150 kHz to 15 MHz	96.6 MHz to 311 MHz tracking			
	15 MHz to 30 MHz	311 MHz to 1000 MHz tracking		1 GHz to 3 GHz	
<b>IF bandwidth</b>					
6dB bandwidth	100Hz, 300Hz, 1 kHz, 3 kHz, 10 kHz, 30 kHz, 100 kHz, 300 kHz, 1 MHz, 3 MHz				
CISPR 16-1-1	200 Hz, 9 kHz, 120kHz, 1 MHz				
<b>Displayed Average Noise Level</b>	Preselector OFF, preamplifiers OFF	Preselector ON, preamplifiers OFF	Preselector ON, preamplifier ON		
9 kHz to 150 kHz (200 Hz RBW)	< -17 dBμV	< -14 dBμV	< -27 dBμV		
0.15 MHz to 30 MHz (9 kHz RBW)	< 0 dBμV	< 3 dBμV	< -14 dBμV		
30 MHz to 300 MHz (120 kHz RBW)	< 4 dBμV	< 1 dBμV	< -5 dBμV		
300 MHz to 3 GHz (120 kHz RBW)	< 10 dBμV	< 6 dBμV	< 0 dBμV		
<b>Detectors</b>	Peak, Quasi-Peak, Average, RMS, RMS-Average (Optional), C-Average Smart Detector function above 30 MHz				
<b>Scan time</b>	A band (9 to 150 kHz) (200 Hz RBW)	B band (150 kHz to 30 MHz) (9 kHz RBW)	C band (30 to 300 MHz) (120 kHz RBW)	D band (300 MHz to 1 GHz) (120 kHz RBW)	E band (1 to 3 GHz) (1 MHz RBW)
SWEEP MODE (CISPR: preselector ON, QP)	< 2 s (Ht 1 s) < 3 s (Ht 2 s)	< 3 s (Ht 1 s) < 5 s (Ht 2 s)	< 20 s (Ht 1 s) < 40 s (Ht 2 s)	< 40 s (Ht 1 s) < 80 s (Ht 2 s)	< 160 s (Ht 1 s) < 320 s (Ht 2 s)
ANALYZER MODE (preselector OFF, PK, Ht lowest)	< 50 ms (Ht 27 ms)	< 10 ms (Ht 525 μs)	< 100 ms (Ht 32 μs)	< 500 ms (Ht 32 μs)	< 400 ms (Ht 4 μs)
<b>Level measuring time</b> (hold time)	CISPR 16-1-1 as default 2 μs to 120 s				
<b>Measurement accuracy</b>					
S/N > 20 dB	9 kHz to 1 GHz ± 1.2 dB 1 to 3 GHz ± 1.6 dB				
<b>Main measuring functions</b>	<ul style="list-style-type: none"> <li>Manual, spectrum analyser and sweep modes</li> <li>Waterfall</li> <li>Standard and user definable limits</li> <li>Conversion and correction factors</li> <li>Control of DDA (Click) analyser, LISNs and other accessories</li> <li>Auto diagnosis;</li> <li>Test reporting</li> </ul>				
<b>Demodulation</b>	AM - FM Internal loudspeaker				
<b>I/O Interface</b> (protocol available for SW developers)	USB 2.0 type B, RS-232 DB9, user port DB15 (drives PMM LISNs and accessories)				
<b>Operating temperature</b>	-5° to 45° C				
<b>Power supply</b>	10 - 15 Vdc, 2.5A with AC universal adapter/charger				
<b>Built-in LISN</b> (compliant to CISPR 16-1-2)					
Frequency range	150 kHz to 30 MHz				
Continuous rated output current	16A				
Max permissible operating voltage	250 Vac - 350 Vdc				
AC supply frequency range	DC to 60 Hz				
CISPR equivalent circuit	50 Ω // (5 Ω + 50 μH)				
Test socket	Schuko 2P+E				
Line plug	IEC 60320 C20				
Artificial hand	4 mm plug				
RF Output	Internal receiver or BNC fem.				
<b>Dimensions (W x H x D)</b>	235 x 105 x 300 mm				
<b>Weight</b>	5.2 kg				

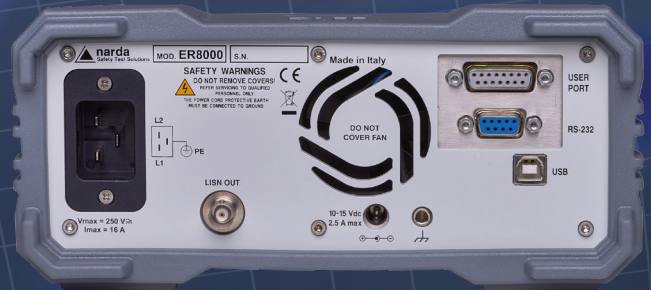

### Ordering information:

**ER8000 Option 00** (9 kHz to 30 MHz)  
**ER8000 Option 01** (9 kHz to 3 GHz)  
 Includes: LISN mains cable, RS232 cable, USB-RS232 serial converter, USB cable, N-m to BNC-f adapter, AC/DC converter with plug adapters, PES PMM Emission Suite Software, soft carrying case, user's manual, standard calibration certificate

### Optional accessories:

**9010/RAV** RMS-Avg detector  
**9010-RMA** rack mount adapter for 19" rack  
**ER8000/GND** Ground connection  
**9010/CC** Rigid Carrying Case.  
 Upgrades:  
**ER8000/00/UP/01** from ER8000 Opt. 00 to ER8000 Opt. 01 (9 kHz to 3 GHz)

## Related products

### Receivers

- 7010/00: EMI Receiver 150 kHz to 1 GHz
- 7010/01: EMI Receiver 9 kHz to 1 GHz
- 7010/02: EMI Receiver 9 kHz to 30 MHz
- 7010/03: EMI Receiver 9 kHz to 3 GHz
- 9010F: EMI Receiver 10 Hz to 30 MHz
- 9010/03P: EMI Receiver 10 Hz to 300 MHz
- 9010/30P: EMI Receiver 10 Hz to 3 GHz
- 9010/60P: EMI Receiver 10 Hz to 6 GHz
- 9030: EMI Receiver 30 MHz to 3 GHz
- 9060: EMI Receiver 30 MHz to 6 GHz
- 9180: EMI Receiver 6 GHz to 18 GHz
- ER9000/00: EMI Receiver 10 Hz to 30 MHz
- ER9000/01: EMI Receiver 10 Hz to 3 GHz
- FR4003: Field Receiver 9 kHz to 30 MHz
- CA0010: Click Analyzer 150 kHz to 30 MHz

### Antennas

- BC-01: Biconical Antenna 30 to 200 MHz
- BL-01: Biconical Log Periodic Antenna 30 MHz to 6 GHz
- DR-01: Double-ridged Horn Antenna 6 to 18 GHz
- LP-02: Log Periodic Antenna 200 MHz to 3 GHz
- LP-03: Log Periodic Antenna 800 MHz to 6 GHz
- LP-04: Log Periodic Antenna 200 MHz to 6 GHz
- VDH-01: Van der Hoofden Test Head 20 kHz to 10 MHz
- TR-01: Antenna Tripod
- Antenna Set AS-02 / AS-03 / AS-04 / AS-05 / AS-06 / AS-07 / AS-08
- RA-01: Rod Antenna 9 kHz to 30 MHz
- RA-01-HV: Rod Antenna 150 kHz to 30 MHz
- RA-01-MIL: Rod Antenna 9 kHz to 30 MHz

### LISN/Probes

- L2-16B: single phase AMN, 16 A
- L3-32: 4 lines, 3-phase AMN, 32 A
- L3-64: 4 lines, 3-phase AMN, 63 A
- L3-64/690V: 4 lines, 3-phase AMN, 63 A
- L3-100: 4 lines, 3-phase AMN, 100 A
- L1-150M: single-path, 50 Ohm AMN, 150 A
- L1-150M1: single-path, 50 Ohm AMN, 150 A
- L1-500: single phase AMN, 500 A
- L3-500: 4 lines, 3-phase AMN, 500 A
- SBRF4: RF Switching Box
- SHC-1/1000: Voltage probe, 1000 Vac, 35 dB
- SHC-2/1000: Voltage probe, 1000 Vac, 30 dB

Sales:  
 Via Rimini, 22  
 20142 Milano (MI) - ITALY  
 Phone: +39 02 581881  
 Fax: +39 02 58188273



L3HARRIS



E-Mail: nardait.support@L3Harris.com  
 Internet: www.narda-sts.it

Headquarters:  
 Via Benesse, 29/B  
 17035 Cisano sul Neva (SV) - ITALY  
 Phone: +39 0182 58641  
 Fax: +39 0182 586400