


Arbitrary/Function Generator

AFG1000 Series Datasheet

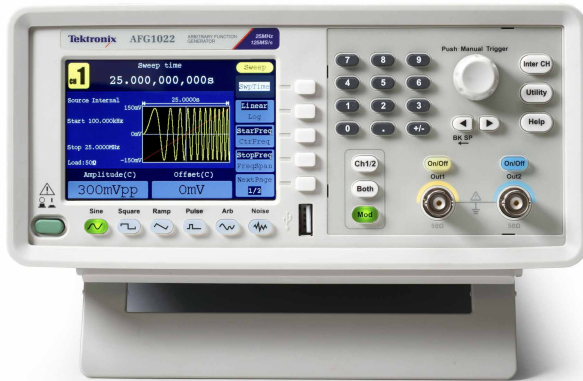

The AFG1000 Series Arbitrary Function Generator provides a waveform generation tool with the best price performance ratio. It includes two models with dual channels, up to 60 MHz bandwidth and up to 10 V_{p-p} output amplitude. The four run modes, 50 built-in frequently-used waveforms and the built-in 200 MHz frequency counter cover most waveform generation needs in your experiment and test jobs. The 3.95-inch TFT LCD, short-cut buttons, USB interface and PC software provide the most intuitive ways to configure the instrument.

Key performance specifications

- Dual-channel, 25 MHz or 60 MHz sine waveforms, 12.5 MHz or 30 MHz square waveforms
- 14 bits, 125 MS/s or 300 MS/s arbitrary waveforms with 8 k points record length
- Amplitude 1 mV_{p-p} to 10 V_{p-p} into 50 Ω loads

Key features

- Continuous, sweeping, burst, and modulation modes (AM, FM, PM, ASK, FSK, PSK, PWM) covers most requirements for students and other users to get the experiments/test job done
- 64-MByte internal non-volatile memory for arbitrary waveform storage
- Built-in 200 MHz counter with 6-digit resolution offers an easy and precise way of frequency/period/pulse width/duty cycle measurement
- Standard USB host/device for memory expansion and remote control
- Free ArbExpress makes user defined waveforms editing extremely easy through an external USB memory stick

- Compatible with TekSmartLab™ for easy teaching and learning
- Standard 5-year warranty

Applications

- Electric and electronics experiments
- Communications experiments
- Sensor simulation
- Functional test

Performance and features

1 μHz to 25 MHz or 60 MHz sine waveform range, with 12-digit or 1 μHz resolution and a ±1 ppm drift high stability time base, provides great signal fidelity in the frequency domain. With 1 mV_{p-p} to 10 V_{p-p} output amplitude range, and 14-bit or 1 mV_{p-p} resolution over the whole frequency range, there is no need to compromise between output amplitude and frequency any more.

Four different run modes cover most use cases with a cost effective solution. 50 most-frequently used standard and arbitrary waveforms are built-in for easy access. Up to 8 K points arbitrary waveforms memory enables users to replicate real world signals captured with a Tektronix oscilloscope or defined with ArbExpress. The built-in 200 MHz and 6-digit resolution frequency counter is an easy and precise way to measure frequencies/periods/pulse widths/duty cycles.

Ease of use

The high-resolution 3.95-inch color TFT display shows relevant settings and parameters in both text and graphic formats, which give users full confidence in their settings, and let them focus on the task at hand. The front panel shortcut buttons and rotary knob make accesses to most frequently used functions and settings with minimum effort and time. The built-in 64-MByte non-volatile memory together with USB stick memory interface, provide unlimited space for user-defined waveform storage.

Software and solutions

The user-defined arbitrary waveforms generated by the free ArbExpress software can easily be loaded on the AFG1000 with a USB memory stick.

As a building block of Tektronix educational solution, the AFG1000 can be embedded into TekSmartLab and enable a cost efficient and effective way of teaching, learning, and lab management.

Specifications

All specifications are guaranteed unless noted otherwise. All specifications apply to all models unless noted otherwise.

Channels

Number of channels 2

Built-in waveforms

Built-in waveforms Sine, Square, Pulse, Ramp, Noise, and 45 frequently used arbitrary waveforms

General characteristics

Sine waves

Range	AFG1022	AFG1062
	1 μ Hz to 25 MHz	1 μ Hz to 60 MHz
Sine wave in burst mode	2 mHz to 25 MHz	2 mHz to 30 MHz
Effective maximum frequency out	25 MHz	60 MHz
Amplitude flatness (1 V_{p-p}), typical		
<10 MHz	± 0.4 dB	± 0.5 dB
≥ 10 MHz and ≤ 25 MHz	± 0.7 dB	
≥ 10 MHz and ≤ 60 MHz		± 0.9 dB
Harmonic distortion (1 V_{p-p})		
≤ 10 MHz	< -50 dBc	< -60 dBc
>10 MHz	< -50 dBc	< -47 dBc
Total harmonic distortion	< 0.2% (10 Hz to 20 kHz, 1 V_{p-p})	
Spurious (1 V_{p-p}), typical	< -45 dBc	
Phase noise, typical	1 MHz: < -110 dBc/Hz at 10 kHz offset, 1 V_{p-p}	

Residual clock noise, typical	-57 dBm	
-------------------------------	---------	--

Square wave

Range	AFG1022	AFG1062
	1 μ Hz to 12.5 MHz	1 μ Hz to 30 MHz

Rise/fall time, typical	<12 ns	<10 ns
-------------------------	--------	--------

Jitter (rms), typical	<1 ns	<500 ps
-----------------------	-------	---------

Overshoot	<5%	
-----------	-----	--

Ramp wave

Range	AFG1022	AFG1062
	1 μ Hz to 1 MHz	1 μ Hz to 2 MHz

Linearity, typical	\leq 0.1% of peak output at 10% - 90% of amplitude range, at 1 kHz, 1 V _{p-p} , 50% symmetry	
--------------------	---	--

Symmetry	0.0% to 100.0%	
----------	----------------	--

Pulse wave

Range	AFG1022	AFG1062
	1 μ Hz to 12.5 MHz	1 μ Hz to 30 MHz

Pulse width range	40 ns to 999 ks	17 ns to 999 ks
-------------------	-----------------	-----------------

Pulse width resolution	1 ns or 4 digits	
------------------------	------------------	--

Pulse duty	<1 MHz, 0.1% to 99.9% (limitations of pulse duty width apply)	
	\geq 1 MHz, 50% fixed	\geq 1 MHz, 50% fixed

Edge transition time, typical	<12 ns, fixed	<10 ns, fixed
-------------------------------	---------------	---------------

Overshoot, typical <5%

Jitter (rms), typical <1 ns <500 ps

Noise

	AFG1022	AFG1062
Noise bandwidth (-3 dB)	25 MHz	50 MHz

Noise type White Gaussian

DC

	AFG1022	AFG1062
Range	-5 V to +5 V, 50 Ω load	
	-10 V to + 10 V, open circuit or high Z load	

Arbitrary waveform

	AFG1022	AFG1062
Range	1 μHz to 10 MHz	1 μHz to 30 MHz

Arbitrary waveform in burst mode 2 mHz to 10 MHz 2 mHz to 30 MHz

Effective analog bandwidth (-3 dB) 30 MHz 60 MHz

Non-volatile memory 64 MByte

Memory Length 2 to 8 K Points

Sampling rate 125 MS/s 300 MS/s

Vertical resolution 14 bits

Rise and fall time	< 10 ns	< 8 ns
--------------------	---------	--------

Jitter (rms), typical	< 6 ns
-----------------------	--------

Frequency

Resolution	AFG1022	AFG1062
	1 μ Hz or 12 digits	

Internal reference stability	± 1 ppm at 0 - 40 °C
------------------------------	--------------------------

Internal reference aging	± 1 ppm per year
--------------------------	----------------------

Amplitude

Range (50 Ω load)

≤ 25 MHz	AFG1022	AFG1062
	1 mV _{p-p} to 10 V _{p-p}	1 mV _{p-p} to 10 V _{p-p}

>25 MHz	-	1 mV _{p-p} to 5 V _{p-p}
---------	---	---

Range (Open circuit or high Z load)

≤ 25 MHz	2 mV _{p-p} to 20 V _{p-p}	2 mV _{p-p} to 20 V _{p-p}
---------------	--	--

>25 MHz	-	2 mV _{p-p} to 10 V _{p-p}
---------	---	--

Accuracy $\pm(1\%$ of setting +1 mV_{p-p}), (1 kHz sine waveform, 0 V offset)

Resolution 1 mV_{p-p}, 1 mV_{rms} or 4 digits

Units V_{p-p}, V_{rms}

Output impedance 50 Ω (typical)

Local impedance setting Selectable: 50 Ω , 1 Ω to 10.000 k Ω , High Z (adjusts displayed amplitude according to selected load impedance)

Isolation No floating ground, signal ground connected to chassis ground

Signal output protection Short-circuit tolerance, main output automatically disabled when over current

DC offset

Range	$\pm(5 V_{pk} - \text{Amplitude}_{p-p}/2)$, 50 Ω load $\pm(10 V_{pk} - \text{Amplitude}_{p-p}/2)$, open circuit or high Z load
-------	--

Accuracy	$\pm(1\% \text{ of } \text{setting} + 1 \text{ mV} + 0.5\% \text{ of amplitude } (V_{p-p}))$
----------	--

Resolution	1 mV or 4 digits
------------	------------------

Modulation

Modulation, sweeping, and burst modes are only available for channel 1 on the AFG1022.

The AFG1062 supports equal strong channels with modulation, sweeping, and burst modes.

Amplitude modulation

Carrier waveforms	Sine, square, ramp, arbitrary, except DC and noise
Source	Internal / external
Internal modulating waveforms	Sine, square, ramp, noise, arbitrary
Internal AM frequency	2 mHz to 20 kHz
Depth	0.0% to 100.0%

Frequency modulation

Carrier waveforms	Sine, square, ramp, arbitrary, except DC and noise
Source	Internal / external
Internal modulating waveforms	Sine, square, ramp, noise, arbitrary
Internal modulating frequency	2 mHz to 20 kHz
Frequency deviation	(limited by carrier waveform type)

AFG1022	AFG1062
2 mHz to 12.5 MHz	2 mHz to 30 MHz

Phase modulation

Carrier waveforms	Sine, square, ramp, arbitrary, except DC and noise
Source	Internal / external
Internal modulating waveforms	Sine, square, ramp, noise, arbitrary
Internal PM frequency	2 mHz to 20 kHz
Phase Deviation	0° to 180°

Amplitude shift keying (AFG1062 only)

Carrier waveforms	Sine, square, ramp, arbitrary, except DC and noise
Source	Internal / external
Internal modulating waveforms	50% duty cycle square
ASK rate	2 mHz to 100 kHz

Frequency shift keying

Carrier waveforms	Sine, square, ramp, arbitrary, except DC and noise
Source	Internal / external
Internal modulating waveforms	50% duty cycle square
FSK rate	2 MHz to 100 kHz

Phase shift keying (AFG1062 only)

Carrier waveforms	Sine, square, ramp, arbitrary, except DC and noise
Source	Internal / external
Internal modulating waveforms	50% duty cycle square
PSK rate	2 MHz to 100 kHz

Pulse width modulation (AFG1062 only)

Carrier waveforms	Pulse, ≤ 1 MHz
Source	Internal / external
Internal modulating waveforms	Sine, square, ramp, arbitrary, except DC and noise
PWM frequency	2 MHz to 20 kHz
Deviation	0.0% to 50.0% of pulse period

Sweeping

Modulation, sweeping, and burst modes are only available for channel 1 on the AFG1022.

The AFG1062 supports equal strong channels with modulation, sweeping, and burst modes.

Carrier waveforms

Carrier waveforms	Sine, square, ramp, arbitrary (AFG1062 only)
-------------------	--

Minimum start-stop frequency	1 μ Hz
------------------------------	------------

Maximum start-stop frequency

Sine	AFG1022	AFG1062
	25 MHz	60 MHz

Square	12.5 MHz	30 MHz
--------	----------	--------

Ramp	1 MHz	2 MHz
------	-------	-------

Type	Linear, logarithmic
------	---------------------

Direction	Up / down
-----------	-----------

Sweep time	1 ms to 500 s \pm 0.1%
------------	--------------------------

Trigger sources	Internal, external, or manual
-----------------	-------------------------------

Burst

Modulation, sweeping, and burst modes are only available for channel 1 on the AFG1022.

The AFG1062 supports equal strong channels with modulation, sweeping, and burst modes.

Waveforms	Sine, square, ramp, pulse, arbitrary except DC and noise
-----------	--

Types	AFG1022: count (1 to 50,000 cycles), infinite, gated AFG1062: count (1 to 1,000,000 cycles), infinite, gated
-------	---

Start phase	-360° to +360°
-------------	----------------

Trigger sources	Internal, external, or manual
-----------------	-------------------------------

Internal trigger interval	(40 ns or (cycles x period) to 500 s) \pm 1%
---------------------------	--

Gate source	External trigger
-------------	------------------

Frequency counter

Function	Frequency, period, positive pulse width, duty cycle
----------	---

Frequency range	100 mHz to 200 MHz
-----------------	--------------------

Frequency resolution	6 digits
----------------------	----------

Coupling mode	AC, DC
---------------	--------

Voltage Range and Sensitivity, DC coupled (non-modulation signal)

100 mHz to 100 MHz	250 mV _{p-p} to 5 V _{p-p} (AC + DC)
--------------------	---

100 MHz to 200 MHz	450 mV _{p-p} to 3 V _{p-p} (AC + DC)
--------------------	---

Voltage range and sensitivity, AC coupled (non-modulation signal)

1 Hz to 100 MHz	250 mV _{p-p} to 5 V _{p-p}
-----------------	---

100 MHz to 200 MHz	450 mV _{p-p} to 4 V _{p-p}
--------------------	---

Pulse width and duty cycle measure	1 Hz to 10 MHz
Input impedance	1 M Ω in parallel with 100 pF
High frequency noise restraint (HFR)	On / Off (HFR frequency = 500 kHz)
Sensitivity	Low, middle, or high
Trigger level range	-2.5 V to +2.5 V

Auxiliary inputs and outputs

External modulation input

Input frequency range	DC to 20 kHz
Input voltage range	All except FSK: ± 1 V full scale, FSK: 3.3 V logic level
Input impedance	12 k Ω (typical)

External trigger input

Level	TTL-compatible
Slope	Rising or falling (selectable)
Pulse Width	>100 ns

External reference clock input

(Shared with Frequency Counter Input)

Impedance	400 Ω , AC coupled
Requested Input voltage swing	100 mV _{p-p} to 5 V _{p-p}
Locking range	10 MHz ± 9 kHz

External reference clock output

Frequency	10 MHz
Impedance	50 Ω , DC coupled
Amplitude	1.6 V _{p-p} into 50 Ω load

Communication interface

USB	Host and device, USB TMC compliance
------------	-------------------------------------

Display

Display type	3.95-inch
---------------------	-----------

Display resolution 480 by 320

Display colors 65,536

Menu and online help languages

Menu and online help languages English and Simplified Chinese

Power source

Supply 220-240 VAC, 100-120 VAC, 50/60 Hz, CAT II

Consumption AFG1022: Less than 28 W
AFG1062: Less than 35 W

Fuse 110 V: 250 V, F1AL
220 V: 250 V, F0.5AL

Warm-up time 30 minutes (typical)

Physical characteristics

Dimensions (W, H, D) 230 × 110 × 306 mm (9.0 × 4.4 × 12.1 in)

Weight

Net 3.4 kg (7.5 lbs)
Shipping 4.7 kg (10.3 lbs)

EMC environment and safety

Temperature

Working 0 °C to 40 °C (32 °F to 104 °F)
Storage -20 °C to 60 °C (-4 °F to 144 °F)

Relative humidity (non-condensing) Operating: ≤ 80%, +0 °C to +40 °C (+32 °F to +104 °F)
Non-operating: 5% to 90%, < +40 °C (+104 °F)
Non-operating: 5% to 80%, ≥ +40 °C (+104 °F) to ≤ +60 °C (+140 °F)

Altitude Operating: up to 3,000 m (9843 ft.) Non-operating: up to 12,000 m (39,370 ft)

Cooling method Fan cooling

EMC compliance

European Union	EN 61326-1
Australia/NZ	CISPR 11, Class A

Safety compliance

- UL 61010-1
 - CAN/CSA-C22.2 No. 61010-1
 - EN 61010-1
 - IEC 61010-1
-

Ordering information

Models

AFG1022	Arbitrary Function Generator
AFG1062	Arbitrary Function Generator

Instrument options

Power plug options

Opt. A0	North America power plug (115 V, 60 Hz)
Opt. A1	Universal Euro power plug (220 V, 50 Hz)
Opt. A2	United Kingdom power plug (240 V, 50 Hz)
Opt. A3	Australia power plug (240 V, 50 Hz)
Opt. A5	Switzerland power plug (220 V, 50 Hz)
Opt. A6	Japan power plug (100 V, 50/60 Hz)
Opt. A10	China power plug (50 Hz)
Opt. A11	India power plug (50 Hz)
Opt. A12	Brazil power plug (60 Hz)
Opt. A99	No power cord

Service options

Opt. C3	Calibration Service 3 Years
Opt. C5	Calibration Service 5 Years

Probes and accessories are not covered by the warranty and Service Offerings. Refer to the datasheet of each probe and accessory model for its unique warranty and calibration terms.

Accessories

Standard Accessories

- AFG1000 Arbitrary/Function Generator Safety and Compliance Instructions; printed document
- AFG1000 Documentation CD containing the following PDF documents:
 - AFG1000 Arbitrary/Function Generators Quick Start User Manual, English
 - AFG1000 Arbitrary/Function Generators Quick Start User Manual, Simplified Chinese
 - AFG1000 Arbitrary/Function Generators Programmer Manual
 - AFG1000 Arbitrary/Function Generators Specifications and Performance Verification Manual
- PDF documents not included on the AFG1000 Documentation CD but available for download from www.tek.com.
 - AFG1000 Arbitrary/Function Generators Quick Start User Manual, Russian, (Tektronix part number 077-1135-xx)
 - AFG1000 Arbitrary/Function Generators Quick Start User Manual, Japanese, (Tektronix part number 077-1166-xx)
- Packing list
- Power cord, specified by country
- Certificate of calibration; printed document
- USB cable x 1, Type A to Type B

- BNC cable x 2
- Tektronix Supplemental Information Sheet For the Peoples Republic of China: China RoHs; printed document
- Fuse, cartridge; 5 x 20 mm, 0.5 A, 250 V, time-delay
- Fuse, cartridge; 5 x 20 mm, 1 A, 250 V, time-delay

Warranty

- Five year warranty on parts and labor

Recommended accessories

- 174-4401-xx, USB cable, type A to type B cable – three feet
- 174-5194-xx, USB cable, type A to type B cable – six feet
- 012-1732-xx, BNC cable assembly, 0 to 1 GHz, shielded – three feet
- 159-0568-xx, Fuse, cartridge; 5 x 20 mm, 0.5 A, 250 V, time-delay
- 159-0569-xx, Fuse, cartridge; 5 x 20 mm, 1 A, 250 V, time-delay



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product Area Assessed: The planning, design/development and manufacture of electronic Test and Measurement instruments.

ASEAN / Australasia (65) 6356 3900
 Belgium 00800 2255 4835*
 Central East Europe and the Baltics +41 52 675 3777
 Finland +41 52 675 3777
 Hong Kong 400 820 5835
 Japan 81 (120) 441 046
 Middle East, Asia, and North Africa +41 52 675 3777
 People's Republic of China 400 820 5835
 Republic of Korea +822 6917 5084, 822 6917 5080
 Spain 00800 2255 4835*
 Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
 Brazil +55 (11) 3759 7627
 Central Europe & Greece +41 52 675 3777
 France 00800 2255 4835*
 India 000 800 650 1835
 Luxembourg +41 52 675 3777
 The Netherlands 00800 2255 4835*
 Poland +41 52 675 3777
 Russia & CIS +7 (495) 6647564
 Sweden 00800 2255 4835*
 United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
 Canada 1 800 833 9200
 Denmark +45 80 88 1401
 Germany 00800 2255 4835*
 Italy 00800 2255 4835*
 Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
 Norway 800 16098
 Portugal 80 08 12370
 South Africa +41 52 675 3777
 Switzerland 00800 2255 4835*
 USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.