



TMS 580

Transformer Loss Measuring System

Datasheet



HAEFELY

Current and voltage – our passion

General Description

The measurement of the losses in power transformers is an indispensable quality-verification process. The TMS 580 system has been specially developed for highly accurate measurements of power losses in transformers.

The TMS 580 system combines well-established and reliable hardware with up-to-date and powerful software.

Loss measurements

The total losses of a transformer are the sum of the no-load and load losses. In general the actual loss figure has to be guaranteed by the manufacturer and is verified for the customer during the acceptance test. The appropriate standard is IEC 60076-8 clause 10


“Guide to the measurement of losses in power transformers”.

Measurement Accuracy

The power factor ($\cos \phi$) of large transformers is small. Even minute phase angle errors of the instrument transformers can lead to substantial power measurement errors. The instrument transformers of the TMS 580 are specially designed to ensure very small phase angle errors thus making additional error correction redundant.

The maximum power measurement error is a function of the power factor.

To allow the current and voltage distortion to be properly measured the TMS 580 instrument accurately responds to the power frequency harmonic encountered.

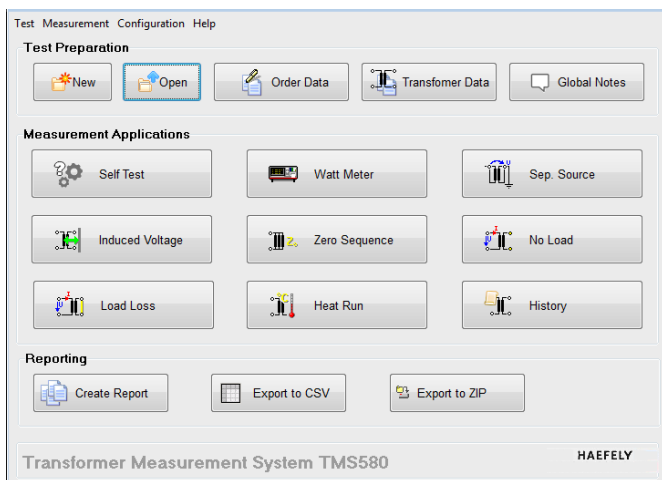

TMS 580 operation software is a result of our close collaboration with transformer test systems users worldwide. It has evolved and improved over the years with continuous interaction with multitudes of users throughout the transformer world.

Software is Fast, Safe and has excellent visualization by means of Graphs, Popup windows and colored symbols

TMS 580 measurement window shows all the data at one time. Color coded display makes it easy to have an overview of the system status and note system ranging.

History function takes care of the storage of measured data. Individual measurements can be marked for reporting.

	A-N	B-N	C-N	Total
U rms	4.664 kV	4.501 kV	4.693 kV	4.620 kV
U rm	4.512 kV	4.411 kV	4.539 kV	4.487 kV
U peak/√2	4.646 kV	4.693 kV	4.531 kV	4.623 kV
U thd	0.03%	0.03%	0.03%	0.00%
	A-B	B-C	C-A	Total
U rms	8.122 kV	7.751 kV	8.287 kV	8.053 kV
U rm	8.300 kV	7.802 kV	7.573 kV	7.892 kV
	A	B	C	Total
I rms	68.903 A	71.283 A	66.768 A	68.985 A
S	321.365 kVA	320.877 kVA	313.358 kVA	955.600 kVA
P	305.609 kW	304.346 kW	296.921 kW	906.876 kW
λ	0.951 ind	0.948 ind	0.948 ind	0.949 ind
f	50.03 Hz			

Technical Data

Model	Range	Accuracy*
TMS 580-100-...	100 V, 200 V, 500 V	0.12 %
	1 kV, 2 kV, 5 kV, 10 kV, 20 kV, 50 kV, 100 kV	0.10 %
2000A	1 A, 2 A,	0.15 %
	5 A, 10 A, 20 A, 50 A, 100 A, 200 A, 500 A, 1000 A, 2000 A	0.11 %
4000A	2 A, 4 A, 10 A, 20 A, 40 A, 100 A, 200 A, 400 A, 1000 A, 2000 A, 4000 A	0.11%
TMS 580-200-...	100 V, 200 V, 500 V	0.12 %
	1 kV, 2 kV, 5 kV, 10 kV, 20 kV, 50 kV, 100 kV, 200 kV	0.10 %
4000A	2 A, 4 A, 10 A, 20 A, 40 A, 100 A, 200 A, 400 A, 1000 A, 2000 A, 4000 A	0.11%

* at 40-110% range utilization, includes uncertainty of calibration, @ 50/60Hz

Power Factor	Range	Accuracy*
cos φ = 1.000	≥ 1 kV, < 20 A	0.20 %
	≥ 1 kV, ≥ 20 A	0.17 %
cos φ = 0.100	≥ 1 kV, < 20 A	0.25 %
	≥ 1 kV, ≥ 20 A	0.19 %
cos φ = 0.050	≥ 1 kV, < 20 A	0.35 %
	≥ 1 kV, ≥ 20 A	0.26 %
cos φ = 0.020	≥ 1 kV, < 20 A / 40A**	0.70 %
cos φ = 0.010	≥ 1 kV, ≥ 20 A / 40A**	1.05 %
cos φ = 0.008	≥ 1 kV, ≥ 20 A / 40A**	1.25 %

* includes uncertainty of calibration /


** for 4000A System, @ 50/60Hz

Voltage Frequency Range

The system can be used in the area depicted.
Amplitude accuracy is typically better than 0.2% for 15 to 400Hz,

Calibration is done at 50/60Hz

- Red: Range at max utilization
- Orange: Range at useful utilization
- Green band: Optimal utilization

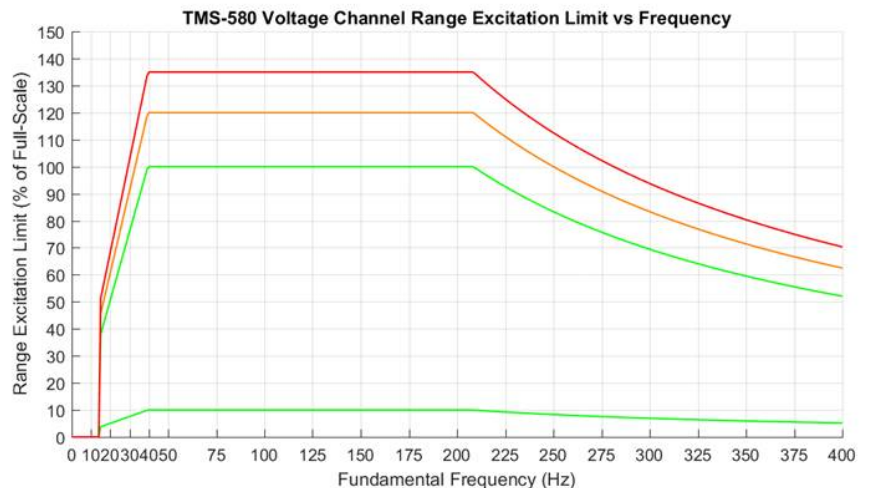

Global Presence

Europe

HAEFELY AG
Birsstrasse 300
4052 Basel
Switzerland

☎ + 41 61 373 4111
✉ sales@haefely.com

China

HAEFELY AG Representative Office
8-1-602, Fortune Street, No. 67
Chaoyang Road, Beijing 100025
China

☎ + 86 10 8578 8099
✉ sales@haefely.com.cn

This document has been drawn up with the utmost care. We cannot, however, guarantee that it is entirely complete, correct or up to date.
©Copyright HAEFELY/ Subject to change without notice

V2020.07