



LCM AUTOMATIC TEST SYSTEM MODEL 2916

Chroma 2916 is a high performance, highly stable LCM Automatic Test System with modular design that can work with different signals and power modules flexibly to compose the test conditions required. It integrates the signals and power source with powerful network function and friendly interface that make it suitable for the production tests of various sizes LCMs including the standard signal source required, pattern inspection and voltage/ current measurements. Chroma 2916 is an integrated LCM ATS equipment that is most applicable for production test, quality inspection or automatic system integration.

This equipment mainly supports LVDS signals with optional TMDS/TTL/Analog/ Display Port signal converters available for purchase to meet the standard test signals requirement for various panels and digital displays of today.

2916 LCM ATS has the following test functions:

LVDS Signal Output

It supports Signal Dual, Quad Link output test with pixel rate up to 540MHz. The test screen resolution supports up to 1920x1080 @180Hz (refresh rate) that complies with the test specification of Full HD high multiple frequency transmission technology nowadays.

Editing Timing, Pattern & Test Sequence

Chroma 2916 supports standard JEIDA/ VESA Timing Format. Users can select the timing parameters directly or build them as need.

Through the combination of Icon, the geometry patterns required for diversified tests can be built, also the natural patterns with the extension of BMP/JPG can be inputted. In the meantime it supports MPEG/ AVI/GIF play format for animation and provides LCD Response time test. All patterns can be scaled based on the LCM resolution and previewed by pattern editor.

Besides the LVDS signals required for LCM test, the LCM electricity specification can be followed to provide parameter settings of Turn On/Turn Off, Scan Timing, Pattern, supply voltage/current high/low limit protection (OCP/OVP/UCP/UVP) and voltage Ramp Up/Ramp Down for the most complete and accurate LCM test.

Multiple High-Precision DC Power Supply

This system has many modularized external power

supplies that are applicable for various kinds of panel sizes. It supports 8 sets of direct power output to provide the power required by LCM control chip, driver chip and backlight module via USB standard interface. Each output contains the actual readings of voltage and current. Its unique design can move the measurement point to load to prevent the transmission voltage drop also ensure the measurement accuracy reaches mV level for complete analysis of LCM working status. Meanwhile each output channel is able to simulate the timing relationship of power on/off, the Ramp-up/down waveform output and over voltage/current protection function. When the status exceeds the setting, in addition to the protection, LED and beeps are activated to remind users to fix it.

Environment & Network Control (Optional)

For production test, Chroma 2916 allows the administrator to preset the operator' s access permission and unify the system management mode to reduce the human operation error. The user friendly graphic interface is very easy to use. Mouse and keypad can be utilized to control the cross coordinate defect positioning check and log during test. Moreover, the information including the LCM defect types and levels as well as all kinds of test report analysis are able to build and generate via the interface. Thus tests can be done in the fastest way to cut down the test time significantly no matter it is applied to R&D or production line.

To fulfill complete test application and management on the production line, network interface is used to maintain and manage the test programs, configure the hardware, upload/download data, compile statistics and write in EDID so that the system administrator can control the production status effectively from remote distance for productivity, efficiency as well as yield rate review. The system also has other external control interfaces such as I2C/SMBUS/PWM to extend the functions and enhance the system flexibility.

2916 LCM ATS is structured based on PC under the OS of Windows 98/2000/XP to give users an easy and familiar operating environment. With powerful software support and user-friendly operation interface to edit Timing / Pattern / Power / Program, the system is able to judge the electrical specification automatically and select the defect type rapidly to save the test time. In addition the test result can be exported to network easily for data gathering and analysis via network management function to provide an excellent solution for production management.

MODEL 2916


Key Features :

- LCM signal and power source test systems
- LVDS 4 channel output
- LVDS pixel rate Signal 135MHz
Dual 270MHz
4 Link 540MHz
- The resolution up to 1920x1080/180Hz
- LVDS data Even/Odd switch support
- TMDS/TTL/Analog/DisplayPort support (option)
- MPEG/AVI/GIF Playback
- Easy transfer pattern file to BMP file
- Output voltage and current measurement
- Output 8 channel DC Power
- Power protection OVP/OCP/UVP/UCP
- EDID read/write/Compare
- External control interface I2C/SMBUS/ PWM individually
- Network function base on fast Ethernet (option)
- GO/NOGO fast measurement
- Operator authority control
- High efficient GUI for easy operation
- Production line process control and data collection

Main System



Single Module




Power Module



450W

780W

4 LINK DATA MAPPING

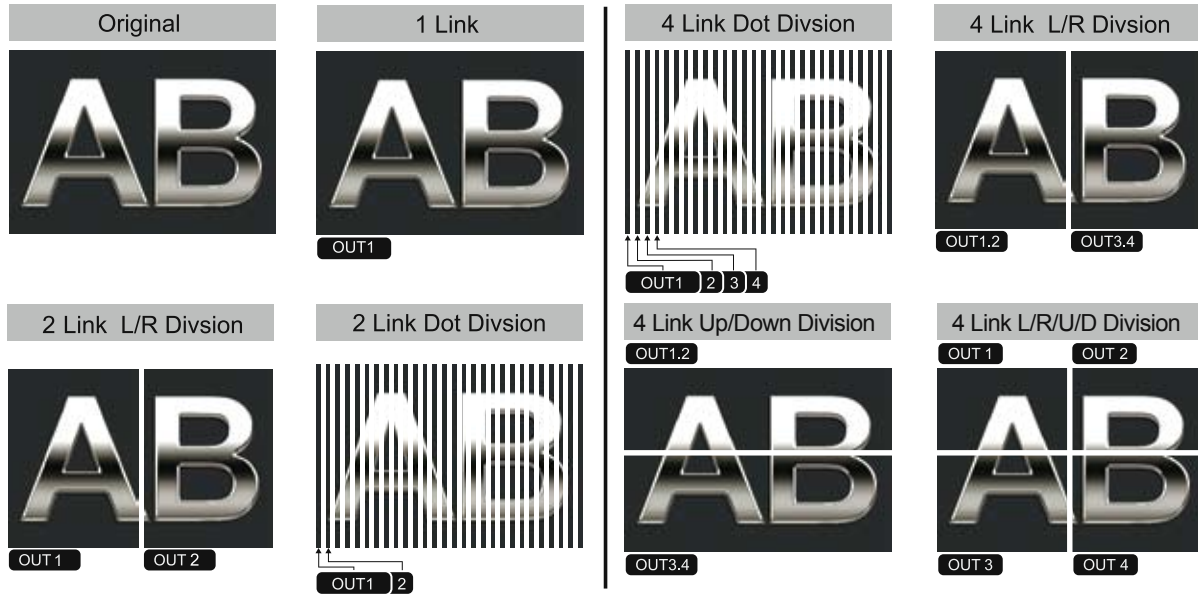

SPECIFICATION

Model	2916
LVDS Interface	
Resolution	640x480; 800x600; 1024x768; 1152x864; 1280x768; 1280x960; 1280x1024; 1400x1050; 1600x900; 1600x1024; 1600x1200; 1920x1080; 1920x1200; 1280x800; 1366x768; 1280x854; 2560x1600
Pixel Rate	1 Link up to 135 MHz 2 Link up to 270 MHz (135 MHz x 2) 4 Link up to 540 MHz (135 MHz x 4)
Signal	6/8/10 Bit and support bit rotate (10 Bit for Gray Scale)
H,V Sync Polarity	+ or -
Video signal output can turn ON OFF by software	

General specifications	
AC Input Voltage	110V~220V+/-10% (Auto Range)
AC Input Frequency	54Hz~66Hz
Operation Temperature	10~40°C
Operation Humidity	Max 80%

Dimension & Weight	
2916 Main System	150x320x422.6mm/5.91x12.6x16.64inch(HxWxD) 8kg/17.62lbs
A291600 Signal module	47x320x200.2mm/1.85x12.6x7.88inch(HxWxD) 2.2kg/4.85lbs
A291610 Ext. Power module	200x100x421.4mm/7.87x3.94x16.59inch(HxWxD) 4.6 kg/10.13 lbs
2916 LCM ATS System (Main unit+ signal module+ power module)	200x420x422.6mm/7.87x16.64x16.54inch(HxWxD) 14.8kgs/32.6lbs

Power Source				
Channel	Channel 1	Channel 2 (option)	Channel 3	Channel 4~8
Output Voltage	2-25V	2-25V	5-50V	0-5V
Output Current	0-3.5A	0-6A	0-20.8A	0-1A
Programmable Resolution				
Output Voltage	20mV	20mV	-	-
Current Protect	5mA	20mA	-	-
Meter Ratings				
Read back Voltage	0-27.5V	0-27.5V	0-55V	-
Read back Current	0-3.85A	0-3.85A	0-22A	-
Meter Resolution				
Voltage	20mV	20mV	20mV	-
Current	5mA	5mA	5mA	-
On / Off Sequence Resolution				
Turn-On/Off	0.5ms	0.5ms	13ms	0.5ms
I²C BUS Function				
SDA	3.3/5V/device select			
SCL	50~100KHz			
V-dim function				
Analog	Analog function 0~8/0.1V step			
V-pwm function				
Vpwm	Selectable 3.3/5V/FV			
Fout	100~15KHz			
Dout	0~100%1% Step			
SMBUS Function				
SDA	3.3/5V/device select			
SCL	10~100KHz			

* All specifications are subject to change without notice.

Developed and Manufactured by :

CHROMA ATE INC.

致茂電子股份有限公司

HEADQUARTERS

66, Hwa-Ya 1st Rd., Hwa-Ya Technology Park, Kuei-Shan Hsiang, Taoyuan Hsien 333, Taiwan
Tel: +886-3-327-9999
Fax: +886-3-327-8898
http://www.chromaate.com
E-mail: chroma@chroma.com.tw

U.S.A.

CHROMA ATE INC. (U.S.A.)
7 Chrysler Irvine, CA 92618
Tel: +1-949-421-0355
Fax: +1-949-421-0353
Toll Free: +1-800-478-2026

EUROPE

CHROMA ATE EUROPE B.V.
Morsestraat 32
NL-6716 AH Ede
The Netherlands
Tel: +31-318-648282
Fax: +31-318-648288

CHINA

CHROMA ELECTRONICS (SHENZHEN) CO., LTD.
8F, No.4, Nanyou Tian An Industrial Estate, Shenzhen, China PC: 518054
Tel: +86-755-2664-4598
Fax: +86-755-2641-9620

BEIJING BRANCH OFFICE
TEL : +86-10-6803-9350; 6803-9361
FAX : +86-10-6803-9852

SUZHOU BRANCH OFFICE
TEL : +86-512-6824-5425
FAX : +86-512-6824-0732

Distributed by:

Worldwide Distribution and Service Network
2916-E-200902-PDF