


## FIELD GENERATING 3162-02 Field Generating Antenna

ETS-Lindgren's Model 3162-02 Field Generating Pyramidal High Gain Horn was specifically developed for the ES-XW7T-1A278- AC specification for radar pulse testing.

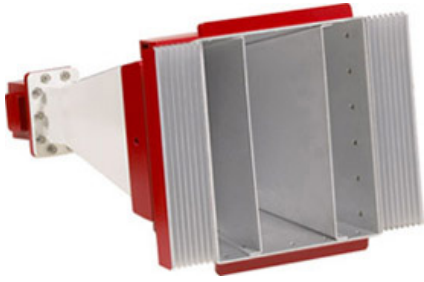

ETS-Lindgren's Model 3162-02 Field Generating Pyramidal High Gain Horn was specifically developed for the ES-XW7T-1A278- AC specification for radar pulse testing. This test requires that the EUT be exposed to a pulsed peak field level of 600 V/m at a distance of 100 cm (39.37 in) from the front of the horn.

Because of near field gain compression, most horns fail to meet this specification at the required test distance. The Model 3162-02 optimizes the near field behavior to overcome this problem, and produces a field level of 600 V/m with input power of less than 300 W.

The Model 3162-02 is a pyramidal horn antenna with nominal dimensions of 70.1 cm L x 30.7 cm W x 36.6 cm H (27.6 in x 12.1 in x 14.4 in) and has extended ground planes with chokes for better gain on each side.

### Key Features

- Frequency Minimum: 2.7 GHz; Frequency Maximum 3.1 GHz.
- Generates 600 V/m with < 300W
- Meets Specs for ES-XW7T-1A278-AC

### Specifications

#### Electrical Specifications

**Frequency Minimum:** 2.7 GHz  
**Frequency Maximum:** 3.1 GHz  
**Impedance (Nominal):** 50  $\Omega$   
**Maximum Continuous Power:** 550 W  
**Pattern Type:** Directional  
**Polarization:** Linear  
**VSWR Maximum:** 2:1  
**VSWR Typical:** 1.5:1  
**Connectors:** Type N

#### Physical Specifications

**Length:** 70.1 cm (27.6 in)  
**Width:** 30.7 cm (12.1 in)  
**Height:** 36.6 cm (14.4 in)

## Other Specifications

---

- Pyramidal Horn Antenna with a Coax to Waveguide Adapter
- Two-year Warranty

## Product Charts

---