

L1-500

Single-phase 9 kHz to 30 MHz, 500 A for AC and DC powered EUT



Main Features

- 9 kHz to 30 MHz frequency range
- Up to 300 A (continuous); 500 A (20 min.) rated output current
- Suitable for DC to 60 Hz power lines
- Built-in, selectable 250 μ H coil (choke)
- Meets the requirements of several standards including CISPR 16-1-2, VDE 0876, FCC part 15, MIL-STD 461F
- Fan air cooling
- Stackable up to four units in wheeled rack (see data sheet L3-500)
- Powering the EUT
- EUT termination to a standardized impedance with respect to ground
- Couples the measuring receiver to the disturbance generated by the EUT
- Decouples the measuring receiver from unwanted RF signals from the power line

Artificial networks or Line Impedance Stabilization Networks (LISNs) are ancillary devices for the repeatable, accurate measurement of the disturbance voltage that EUT (equipment under test) may inject into the power mains.

This is accomplished through the use of reference impedance values and phase responses across the frequency range of the test.

L1-500 is suitable for measurement on power circuits from DC to 60 Hz.

The equivalent V-Network circuit of 50 Ω // (5 Ω + 50 μ H) with 250 μ H choke is fully compliant with common standards.

PMM LISNs feature robust and stable mechanical construction, high quality electric components, easy and perfect grounding and solid input-output power connections. They can be used in conjunction with any EMI receiver or spectrum analyzer and are built to provide safe, repeatable and accurate measurements.

L1-500

Single-phase 9 kHz to 30 MHz, 500 A for AC and DC powered EUT

SPECIFICATIONS

Frequency range	9 kHz to 30 MHz
Maximum rated output current	500 A (20 min., starting test at max 25 °C LISN internal temperature) 300 A (continuous)
Maximum operating voltage (L/N) (L/PE)	400 Vac; 565 Vdc
Power line frequency range	DC - 60 Hz
Equivalent circuit	50 Ω // [5 Ω + 50 μH] with 250 μH choke or bypass
RF output	BNC female
EUT, power line, ground connectors	M14 bolts
Operating temperature	-10 °C to +40 °C
Storage temperature	-25 °C to +75 °C
Dimensions (W x H x D)	510 x 175 x 830 mm
Weight	55 kg
Services AC supply	230 V - 50/60 Hz, 50 VA
Air cooling fans	2 x 120 mm
LED indicators	Power, fan, overheating, AC present
Contactor	250 V AC/DC - 10 A max

- As a safety precaution, due to the ground protection relays, properly rated insulating transformers must be installed between the power mains and the LISN inputs.
- Noise levels may require the installation of properly rated mains filters to reduce unwanted signals.

Ordering information:



L1-500 single-phase 9 kHz to 30 MHz, 500 A for AC and DC powered EUTs

Includes: power supply cable, RF cable, contactors connector, user's manual, calibration certificate

Optional accessories:

SBRF4 RF switching box

Automatic (in conjunction with PMM receivers) and manual switching of up to four single-path AMNs. Internal 50 Ohm terminations and switchable 150 kHz high-pass filter. Low insertion loss. Max. operating frequency: 108 MHz

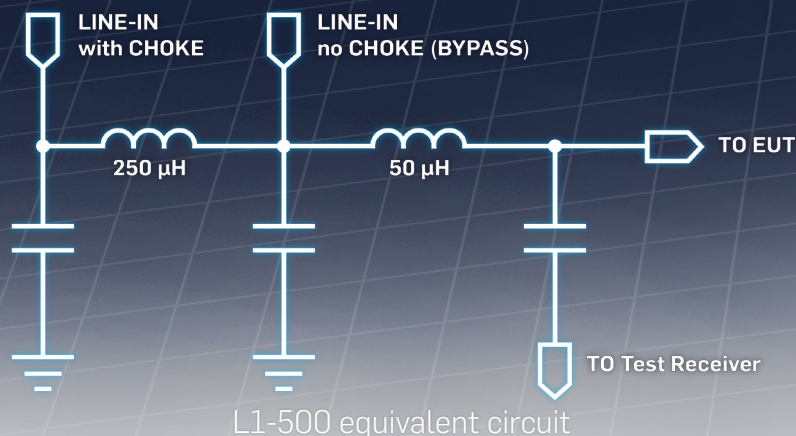

L1-500 equivalent circuit

Related products

Receivers

- 7010/00: EMI Receiver 150 kHz to 1 GHz
- 7010/01: EMI Receiver 9 kHz to 1 GHz
- 7010/02: EMI Receiver 9 kHz to 30 MHz
- 7010/03: EMI Receiver 9 kHz to 3 GHz
- 9010: EMI Receiver 10 Hz to 30 MHz
- 9010F: EMI Receiver 10 Hz to 30 MHz
- 9010/03P: EMI Receiver 10 Hz to 300 MHz
- 9010/30P: EMI Receiver 10 Hz to 3 GHz
- 9010/60P: EMI Receiver 10 Hz to 6 GHz

LISNs

- L2-16B: single phase AMN, 16 A
- L3-32: 4 lines, 3-phase AMN, 32 A
- L3-64: 4 lines, 3-phase AMN, 63 A
- L3-64/690: 4 lines, 3-phase AMN, 63 A
- L3-100: 4 lines, 3-phase AMN, 100 A
- L1-150M: single-path, 50 Ohm AMN, 150 A
- L1-150M1: single-path, 50 Ohm AMN, 150 A
- L3-500: 4 lines, 3-phase AMN, 500 A
- L2-D: Delta LISN for telecom, 2 A, 150 Ω

RFI Filters

- FIL-L2-16F: single phase RFI filter, 16 A
- FIL-L2-24M: single phase RFI filter, 24 A
- FIL-L3-32M: 3-phase+neutral RFI filter, 32 A
- FIL-L3-70M: 3-phase+neutral RFI filter, 70 A



A BRAND OF



an IS Technologies Company

E-Mail: nardait.support@L-3com.com
Internet: www.narda-sts.it

Sales:
Via Leonardo da Vinci, 21/23
20090 Segrate (Milano) - ITALY
Phone: +39 02 2699871
Fax: +39 02 26998700

Headquarters:
Via Benessea, 29/B
17035 Cisano sul Neva (SV) - ITALY
Phone: +39 0182 58641
Fax: +39 0182 586400