


RA-01

Active rod antenna 9 kHz to 30 MHz

Main Features

- 9 kHz to 30 MHz (RA-01 or RA-01-MIL) or 150 kHz to 30 MHz (RA-01-HV) frequency range
- CISPR 16-1-4, CISPR 12, CISPR 25, MIL-STD-461 and DO-160 fully compliant
- Built-in wide band amplifier
- Excellent flatness
- Individual calibration
- High rejection to 50 Hz
- Rechargeable Ni-MH battery for extra longevity
- Easy assembly
- Tripod mounting adapter
- Ruggedized aluminium case and rod, stainless steel counterpoise

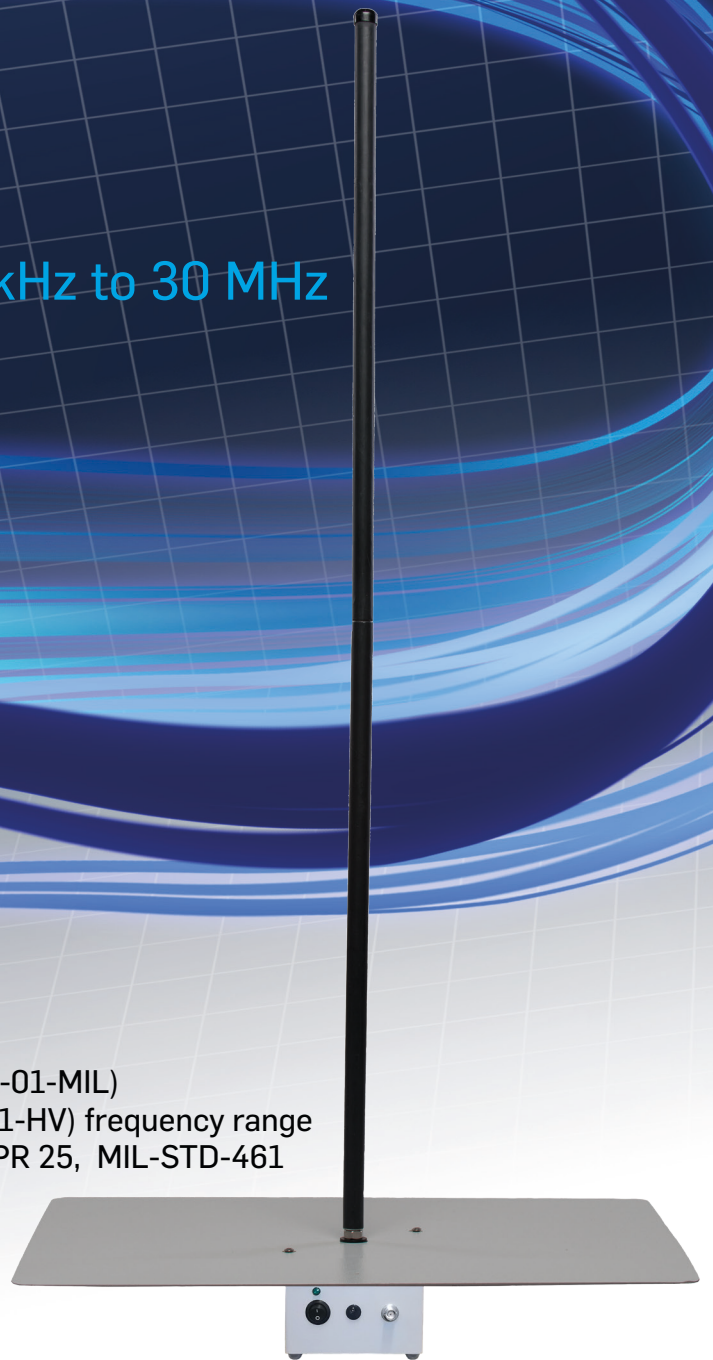

RA-01 Rod Antenna is an active monopole antenna built to CISPR 16-1-4 specifications and perfect for RF electric field measurements in a wide variety of EMC applications. The RA-01-HV model is ruggedized to be able to withstand 50 Hz electric fields as high as 8 kV/m, and is therefore best suited to performing interference measurements in close proximity to high-voltage power lines.

The RA-01-MIL is a 41" monopole antenna as per the most common military and aerospace specifications.

RA-01 can be used in conjunction with any PMM Receiver or Spectrum Analyzer, although its ideal companion for on-site measurements is the EMI Receiver Unit 9010F, portable and fully compliant with CISPR-16-1-1.

RA-01

Active Rod Antenna 9 kHz to 30 MHz

| SPECIFICATIONS | RA-01 and RA-01-MIL | RA-01-HV |
|------------------------------------|------------------------------------|-------------------|
| Frequency range | 9 kHz to 30 MHz | 150 kHz to 30 MHz |
| Output Impedance | 50 Ω | |
| Output connector | BNC female | |
| Internal battery | Ni-MH Rechargeable 7,2 V - 720 mAh | |
| Operating time | > 24 hours | |
| Recharging time | 6 hours | |
| Tripod mounting | Threaded insert UNC ¼" | |
| Antenna factor | 10 dB/m nominal | |
| Operating temperature | -10 °C to 60 °C | |
| Operating humidity | 0 to 98% RH (without condensation) | |
| Storage temperature | -30 °C to 75 °C | |
| Dimensions and weights (W x H x D) | | |
| Box | 133 x 115 x 133 mm | 0,90 kg |
| Counterpoise | 600 x 1,5 x 600 mm | 4,15 kg |
| Rod RA-01 and RA-01-HV | Ø 19 x 1000 mm | 0,45 kg |
| Rod RA-01-MIL | Ø 19 x 1041 mm | 0,45 kg |
| TOTAL (w rod ext.) | 600 x 1156 x 600 mm | 5,95 kg |



Ordering information:

RA-01 Rod Antenna with individual calibration report

RA-01-HV Rod Antenna with individual calibration report

RA-01-MIL Rod Antenna with individual calibration report

Includes: 600x600 mm counterpoise, universal AC battery charger, user's manual, carrying case

Optional accessories:

TR-01A set

Includes: TR01 60-180 cm wooden column extendable tripod, column strengthener, soft carrying case

Related products and services

Receivers

- 7010/00: EMI Receiver 150 kHz to 1 GHz
- 7010/01: EMI Receiver 9 kHz to 1 GHz
- 7010/02: EMI Receiver 9 kHz to 30 MHz
- 7010/03: EMI Receiver 9 kHz to 3 GHz
- 9010: EMI Receiver 10 Hz to 30 MHz
- 9010F: EMI Receiver 10 Hz to 30 MHz
- 9010/03P: EMI Receiver 10 Hz to 300 MHz
- 9010/30P: EMI Receiver 10 Hz to 3 GHz
- 9010/60P: EMI Receiver 10 Hz to 6 GHz
- 9030: EMI Receiver 30 MHz to 3 GHz
- 9060: EMI Receiver 30 MHz to 6 GHz
- 9180: EMI Receiver 6 GHz to 18 GHz
- FR4003: Field Receiver 9 KHz to 30 MHz

Antennas

- BC-01: Biconical Antenna 30 to 200 MHz
- BL-01: Biconical Log Periodic Antenna 30 MHz to 6 GHz
- DR-01: Double-ridged horn Antenna 6 to 18 GHz
- LP-02: Log Periodic Antenna 200 MHz to 3 GHz
- LP-03: Log Periodic Antenna 800 MHz to 6 GHz
- LP-04: Log Periodic Antenna 200 MHz to 6 GHz
- TR-01: 60-180 cm wooden extendable tripod
- VDH-01: Van der Hoofden Test Head 20 kHz to 10 MHz
- Antenna Set AS-02 (BC01+LP02+TR01)
- Antenna Set AS-03 (BC01+LP02+LP03+TR01)
- Antenna Set AS-04 (BC01+LP04+TR01)
- Antenna Set AS-05 (BC01+LP04+DR01+TR01)
- Antenna Set AS-06 (BC01+LP-02+LP03+DR01+TR01)
- Antenna Set AS-07 (BL01+TR01)
- Antenna Set AS-08 (BL01+DR01+TR01)
- RA-01: Rod Antenna 9 kHz to 30 MHz
- RA-01-MIL: Rod Antenna 9 kHz to 30 MHz
- RA-01-HV: Rod Antenna 150 kHz to 30 MHz

Calibrations services

- ANSI 63.5 Antenna Factor
- SAE ARP 958-D
- Free-Space Antenna Factor



L3HARRIS

narda
Safety Test Solutions

Sales:
Via Rimini, 22
20142 Milano - ITALY
Phone: +39 02 581881
Fax: +39 02 58188273

E-Mail: nardait.support@L3Harris.com
Internet: www.narda-sts.it

Headquarters:
Via Benesse, 29/B
17035 Cisano sul Neva (SV) - ITALY
Phone: +39 0182 58641
Fax: +39 0182 586400