


Real-time results

Antenna pattern measurement in seconds

The RFX is a compact bench-top scanner that characterizes antennas in your own lab environment in **real-time**. RFX provides far-field patterns, bisections, EIRP and TRP in seconds. Novel near-field results, including amplitude, polarity and phase give insights into the root causes of antenna performance challenges and help troubleshoot far-field radiation patterns.

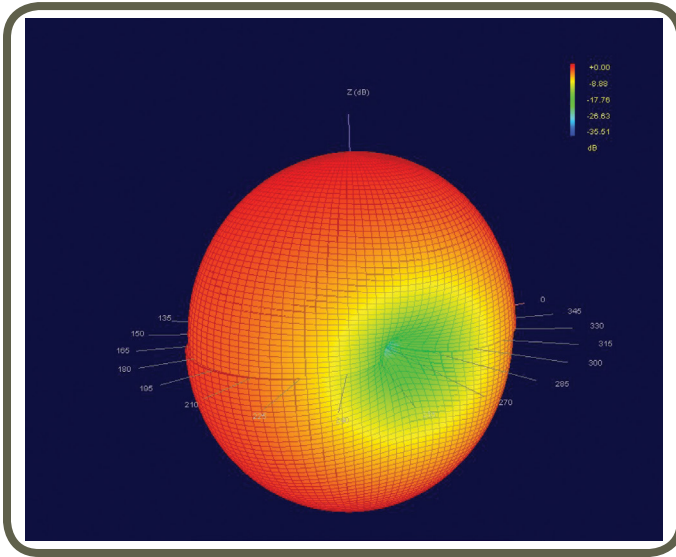

RFX can also integrate with a network analyzer to measure gain, efficiency and S_{11} of an antenna, and with a base station emulator to test cell phones. Users can execute real-time analysis of their embedded antenna designs and test multiple design iterations, on the lab bench, in seconds at each stage of the design process. RFX also gives wireless engineers the freedom to do rapid prototyping and explore new designs, new materials and new forms. Wireless engineers and designers can test multiple design variations and optimize complex embedded antenna designs at their lab bench in seconds without wasting time waiting in congested anechoic chamber lines. They can optimize positioning and effects from layout, monitor changes from packaging or

layout changes or verify performance of final product in real-time and then go to the chambers for final certification requirements with their mind at ease, knowing that their design will achieve a first-time pass.

With the Circular Polarization (CP) option, the RFX calculates the right and left hand circularly polarized patterns and displays axial ratio patterns. RFX can be integrated into virtually any automated test bed and production line by using DLL programming. As a golden sample comparison tool with real-time results, the RFX is also ideal for sample lot testing and product verification for wireless service providers or for manufacturing support.

RFX allows design teams to **reduce testing time** by at least one order of magnitude. Users have also documented fifty percent reductions in design cycle times. RFX provides antenna designers and wireless engineers with an **easy-to-use, cost-effective, and proven tabletop solution**.

With its real-time capability, RFX is a perfect tool to improve the design process for manufacturers of cellular, GPS, WiFi, RFID, Bluetooth, LTE, MIMO, custom and medical devices.



RFX Features

Capability	2D and 3D near-field patterns (amplitude, phase and polarization) Far-field patterns and bi-sections (cartesian and polar) EIRP and TRP Graph S_{11} Calculate gain and efficiency Automatic comparisons with user defined Golden Sample (sample lot testing and production line testing) Separately purchased options Circular Polarization: Right (RHCP) and left hand circularly polarized patterns (LHCP) and Axial Ratio (AR) (Part #: 3000-0303) Base Station Emulator programmable control (Part #: 3000-0300)
Scan time	in seconds
Supported base station emulators	List at https://www.emscan.com/products/antenna-testing/rfx/ If your BSE is not listed, please contact EMSCAN for custom driver
Supported network analyzers	List at https://www.emscan.com/products/antenna-testing/rfx/ If your VNA is not listed, please contact EMSCAN for custom driver
Supported operating systems	Windows 10®, Windows 8.1®, Windows 8®, Windows 7®, Windows Vista®

RFX Scanner Specifications

Broadband frequency coverage	300 MHz to 6 GHz Base configuration 300 MHz to 6 GHz (3-year warranty Part #: 3000-0603, 5-year warranty Part #: 3000-0601) Option 300 MHz to 2.75 GHz (3-year warranty Part #: 3000-0602, 5-year warranty Part #: 3000-0600) Upgrade option 2.75 GHz to 6 GHz (Part #: 3000-0121; 3000-0602 pre-requisite)																											
Antenna array	384 (24 x 16) H-field probes																											
Measurement sensitivity	0 dBm source power for a reasonably efficient antenna																											
Measurement accuracy	<table border="1"> <thead> <tr> <th colspan="3">Band 1: 300 MHz - 1GHz</th> <th colspan="3">Band 2: 1 GHz - 3 GHz</th> <th colspan="3">Band 3: 3 GHz - 6 GHz</th> </tr> <tr> <th>σ</th> <th>2σ</th> <th>N</th> <th>σ</th> <th>2σ</th> <th>N</th> <th>σ</th> <th>2σ</th> <th>N</th> </tr> </thead> <tbody> <tr> <td>1.96</td> <td>3.92</td> <td>170</td> <td>0.81</td> <td>1.62</td> <td>514</td> <td>1.10</td> <td>2.20</td> <td>246</td> </tr> </tbody> </table>	Band 1: 300 MHz - 1GHz			Band 2: 1 GHz - 3 GHz			Band 3: 3 GHz - 6 GHz			σ	2σ	N	σ	2σ	N	σ	2σ	N	1.96	3.92	170	0.81	1.62	514	1.10	2.20	246
Band 1: 300 MHz - 1GHz			Band 2: 1 GHz - 3 GHz			Band 3: 3 GHz - 6 GHz																						
σ	2σ	N	σ	2σ	N	σ	2σ	N																				
1.96	3.92	170	0.81	1.62	514	1.10	2.20	246																				
Measurement repeatability	+/- 0.2 dB																											
Far-field resolution	1.8° for theta and 3.6° for phi																											
Maximum radiator size	L 16 cm x W 10 cm (L 6.30" x W 3.94")																											
Resolution Bandwidth	Resolution Bandwidth = IF Bandwidth of 60MHz																											
Probe to probe uniformity	Calibrated before shipment Firmware correction factors adjust for frequency dependant probe responses with < +/- 0.5 dB accuracy																											
Probe to probe isolation	> 20 dB																											
Maximum radiated power	+33 dBm																											
Operating temperature	From -20 °C to +45 °C (continuous fixed frequency scan at 2440 MHz)																											
Modulation formats	GSM / CDMA / WCDMA / WiFi / WiMAX / LTE Bluetooth RFID GPS Custom antenna																											
Scanner connections	PC: USB Power: 6 VDC, 3.0 A																											
Dimensions	L 32.1 cm x W 24 cm x H 7 cm (L 12.64" x W 9.45" x H 2.76")																											
Weight	3.8 kg / 8.38 lb (including cables and adaptor)																											



#1, 1715-27 Avenue NE
Calgary, AB T2E 7E1
Canada

Tel: +1-403-291 0313
Fax: +1-403-250 8786

www.emscan.com