
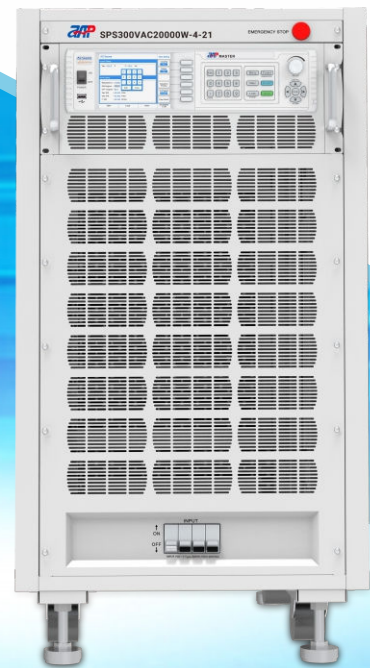


SPS-300 Series AC Power Supply System

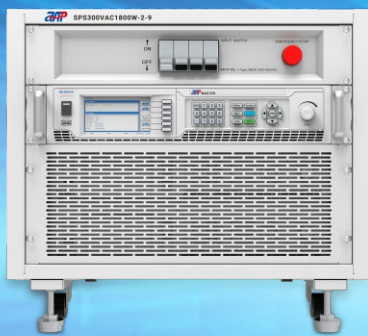

■ High Efficiency

■ High Precision

■ High Stability

SPS-300 Series AC Power Supply System




Output			Connection Type	Model	Size	Standard Interface	Optional Information	Certificates
Rated Voltage	Rated Power	Rated Current						
150V/300V	1200W	10.08A/5.04A	1-Phase	2 Parallel	9U ⁴	RS232/RS485/USB	(1)	CE
150V/300V	2000W	15.56A/8.28A				RS232/RS485/USB		
150V/300V	3000W	24.84A/12.42A				RS232/RS485/USB		
150V/300V	4000W	28.8A/14.4A			17U ⁵	RS232/RS485/USB/LAN	(2) (3)	
150V/300V	6000W	49.68A/24.84A				RS232/RS485/USB/LAN		
150V/300V	8000W	57.6A/28.8A				RS232/RS485/USB/LAN		
150V/300V	10000W	82.8A/41.4A				RS232/RS485/USB/LAN		
150V/300V	1800W	15.12A/7.56A	1-Phase	3 Parallel	9U ⁴	RS232/RS485/USB	(1)	CE
150V/300V	3000W	24.84A/12.42A				RS232/RS485/USB		
150V/300V	4500W	37.26A/18.63A				RS232/RS485/USB		
150V/300V	6000W	43.2A/21.6A			17U ⁵	RS232/RS485/USB/LAN	(2) (3)	
150V/300V	9000W	74.52A/37.26A				RS232/RS485/USB/LAN		
150V/300V	12000W	86.4A/43.2A				RS232/RS485/USB/LAN		
150V/300V	15000W	124.2A/62.1A				RS232/RS485/USB/LAN		
150V/300V	2400W	20.16A/10.08A	1-Phase	4 Parallel	17U ⁵	RS232/RS485/USB	(1)	CE
150V/300V	4000W	33.12A/15.56A				RS232/RS485/USB		
150V/300V	6000W	49.68A/24.84A				RS232/RS485/USB		
150V/300V	8000W	57.6A/28.8A			21U ⁶	RS232/RS485/USB/LAN	(2) (3)	
150V/300V	12000W	99.36A/49.68A				RS232/RS485/USB/LAN		
150V/300V	16000W	115.2A/57.6A				RS232/RS485/USB/LAN		
150V/300V	20000W	165.6A/82.8A				RS232/RS485/USB/LAN		
300V/600V	1200W	5.04A/2.52A	1-Phase	2 Series	9U ⁴	RS232/RS485/USB	(1)	CE
300V/600V	2000W	8.28A/4.14A				RS232/RS485/USB		
300V/600V	3000W	12.42A/6.21A				RS232/RS485/USB		
300V/600V	4000W	14.4A/7.2A			17U ⁵	RS232/RS485/USB/LAN	(2) (3)	
300V/600V	6000W	24.84A/12.42A				RS232/RS485/USB/LAN		
300V/600V	8000W	28.8A/14.4A				RS232/RS485/USB/LAN		
300V/600V	10000W	41.4A/20.7A				RS232/RS485/USB/LAN		

Dimensions & Weight



Optional Information


(1) LAN & GPIB interface card & cables

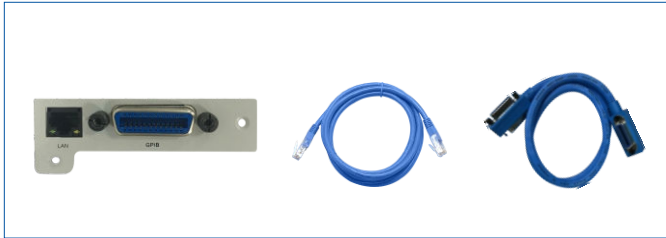

(2) GPIB interface card & cable



(3) LAN interface card & cable



Features

- Large touch color screen, possess complete functions and easy to operate.
- AC+DC mixed or independent output mode for voltage DC offset simulation.
- Capable of setting output slope/phase angle, 0~359.9°.
- Output frequency 15~1000Hz, capable of setting output slope of voltage and frequency.
- High output crest factor could satisfy surge tests requirements.
- Multiple current measuring level selection. Increase measurement accuracy.
- Standard USB data interface, support CSV file waveform import.
- OCP/OVP/OPP/OTP/ Short circuit protection.
- Built-in power meter, which is capable of measuring 15 electrical parameters per phase, including voltage, current, power, etc.
- With reverse current protection to avoid current flowing backward.
- Capable of setting voltage and current output restriction, support for constant current output mode.

Panel Introduction

0.6 - 1.5kVA

- 1 Power Switch (Up), USB Interface (Down)
- 2 Color Touch Screen
- 3 Multifunctional Keys
- 4 Numeric and Functional Keys


Front Panel Introduction



2 - 5kVA

- 1 Power Switch (Up), USB Interface (Down)
- 2 Color Touch Screen
- 3 Multifunctional Keys
- 4 Numeric and Functional Keys

Front Panel Introduction


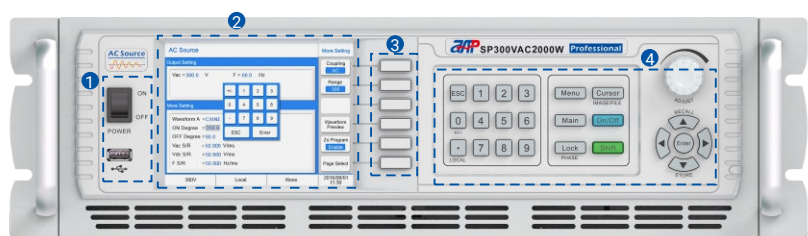


SPS-300 Series AC Power Supply System

Function Introduction


Graphical User Interface

The large color touch screen provides simple and fast operation for customers, real-time update of display output data and power status, and graphical display makes it more intuitive.

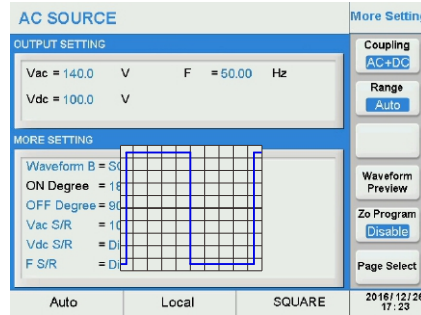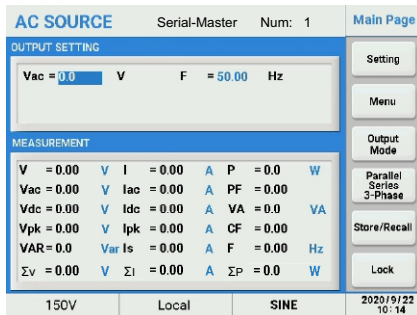


Settable ON/OFF Phase Angle of Output Waveform

This series of AC power supply can set the ON phase and OFF phase of sinusoidal output waveform, suitable for the output test of switching power supply. Set the ON angle to 90 degrees for surge current testing, the power supply will show the measured value of surge current. Users can set when start to measure the surge current and the duration of the measurement.

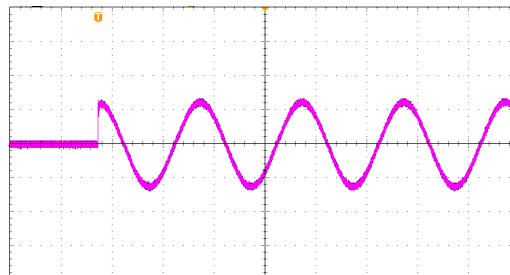


Slew Rate Setting For Voltage and Frequency

This series AC power supply let users set the slew rate of voltage and frequency, in such application in order to reduce the inrush current during motor or compressor startup.

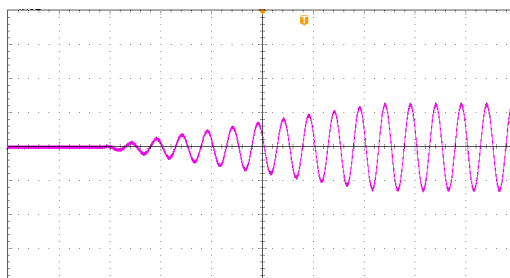

Triac Dimmer Function



This series AC power supply built-in triac dimmer function, which is used to do dimming and speed regulating test for lamp or electric motor to ensure the products work well both in R&D and production testing.

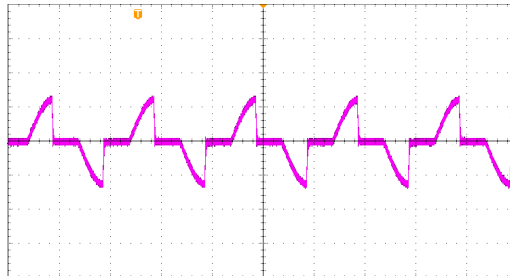



Power Line Disturbance Simulation

This series AC power supply provides powerful function to simulate all kinds of power line disturbance conditions such as cycle dropout, transient spike, brown out and etc. This feature make this series AC power supply ideal for R&D labs, universities and certification labs.

LIST Mode

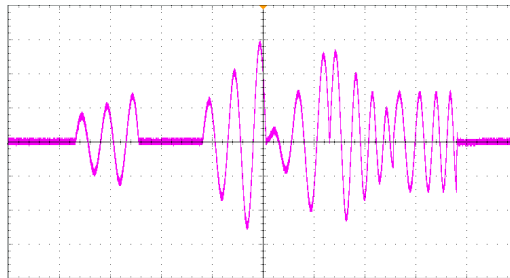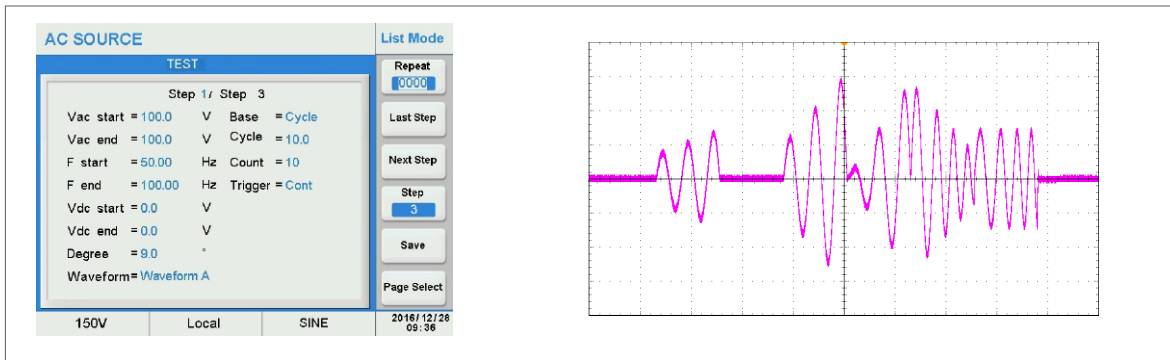

STEP Mode

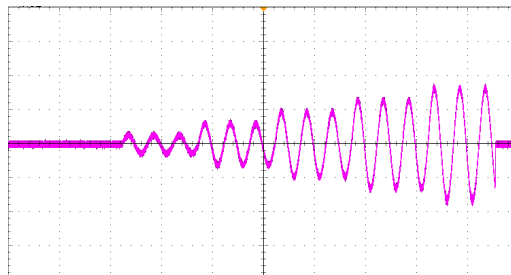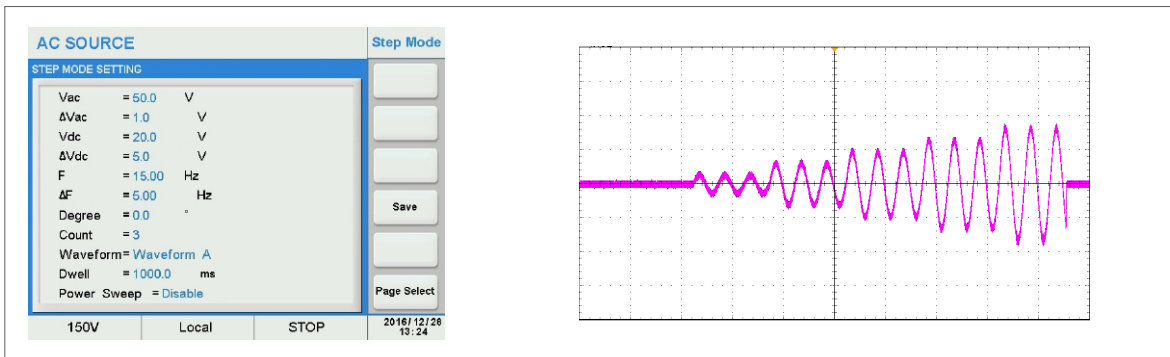

SPS-300 Series AC Power Supply System

PULSE Mode

AC SOURCE Pulse Mode

PULSE MODE SETTING

Vac = 50.0 V

Vdc = 30.0 V

F = 15.00 Hz

Duty Cycle = 50.0 %

Degree = 0.0 °

Waveform = Waveform A

Period = 100.0 ms

Count = 3

Start = 0.0 ms

Save

Page Select

150V
Local
STOP
2016/12/26 13:09

Voltage Sags/Voltage Spikes

AC SOURCE Transient

TRANSIENT SETTING

Trans-Start = 18.0 ms

Trans-Volt = 424.2 V

Trans-Time = 2.0 ms

Trans-Count = 9999

Save

Page Select

150V
Local
STOP
2016/12/29 11:43

Voltage Sags

Voltage Spikes

File Save and Recall Via The USB Interface

The user can save the screenshot via the USB interface in the front panel. The user can import a CSV file via the USB interface to generate waveform output.

AC SOURCE Main Page

OUTPUT SETTING

Vac = 0.0 V F = 0.00 Hz

USB

MEASUREMENT

V = 0.00

Vac = 0.00

Vdc = 0.00

Vpk = 0.00

VAR = 0.00

Setting

Menu

Output Mode

Phase

Store/Recall

Lock


150V
Local
SINE
2080/01/10 04:07

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
1	Last	Total	Step	Step	Mode	Step	Pages	Degree	Waveform	Vac(V)	Vdc(V)	Vpk(V)	Vavg(V)	Vrms(V)	Vbase(V)	Cycle	Time(s)		
2	24	23	9	1	Coast	10	9	A	100	100	50	100	0	0	0	Cycle	10		
3	24	23	9	2	Coast	10	9	A	100	100	50	100	0	0	0	Cycle	10		
4	24	23	9	3	Coast	10	9	A	100	100	50	100	0	0	0	Cycle	10		
5	24	23	9	4	Coast	10	9	A	100	100	50	100	0	0	0	Cycle	10		
6	24	23	9	5	Coast	10	9	A	100	100	50	100	0	0	0	Cycle	10		
7	24	23	9	6	Coast	10	9	A	100	100	50	100	0	0	0	Cycle	10		
8	24	23	9	7	Coast	10	9	A	100	100	50	100	0	0	0	Cycle	10		
9	24	23	9	8	Coast	10	9	A	100	100	50	100	0	0	0	Cycle	10		
10	24	23	9	9	Coast	10	9	A	100	100	50	100	0	0	0	Cycle	10		
11																			
12																			


Monitoring Software

AC Waveform Simulation Panel is a graphical user interface that provides extraordinary capabilities and convenience by delivering control of the unit remotely, which covers all functions of panel operation.


Login Interface

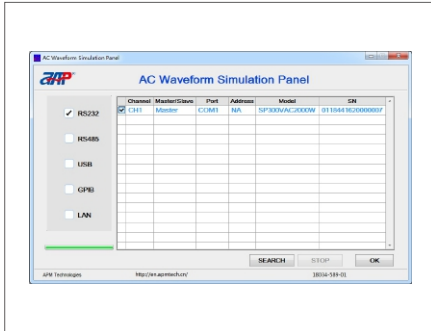


Basic mode(Main interface)

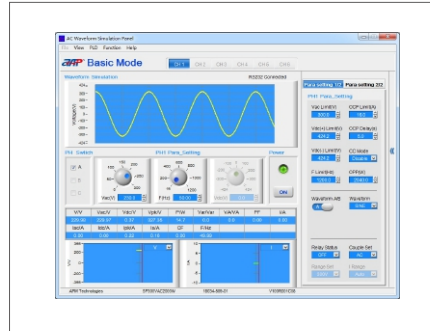


IEC61000 4-11 interface

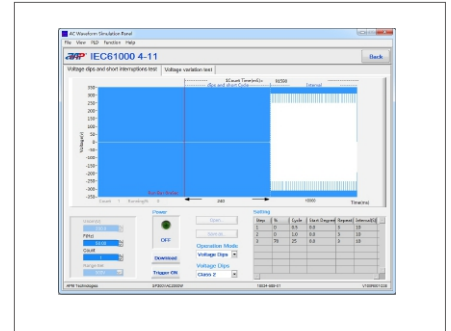


List mode interface

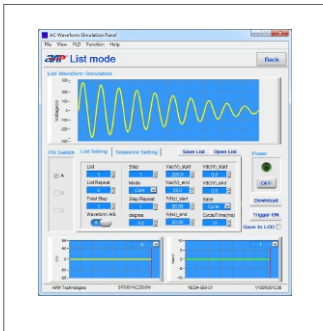


Pulse mode interface

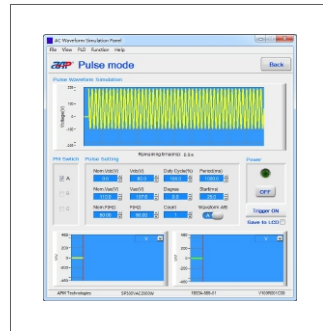


Step mode interface

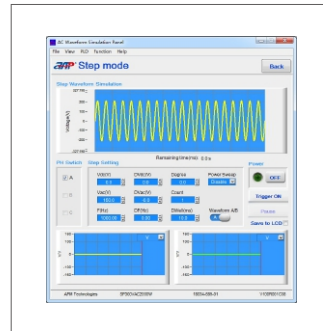


IEC61000 4-13 interface




IEC61000 4-14 interface

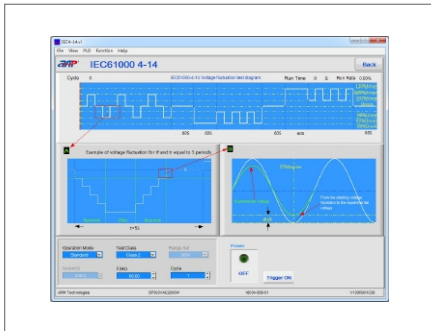

IEC61000 4-28 interface

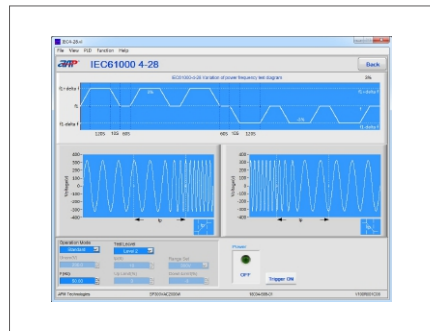


Synthesis mode interface

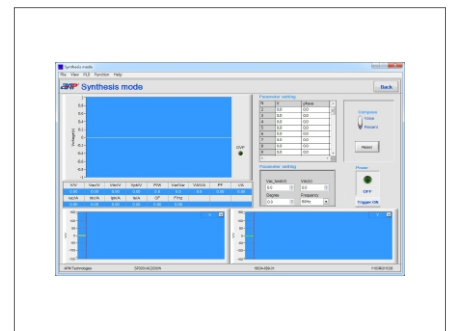


Harmonics Measure mode interface



Auto run mode interface

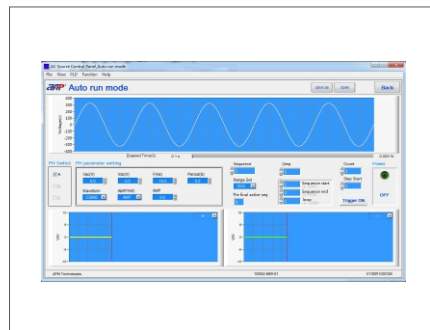

Special Func interface

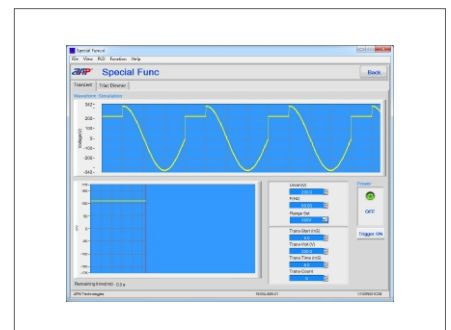

SPS-300 Series AC Power Supply System

MODEL	SPS300VAC1200W-2-9		SPS300VAC1800W-2-9		SPS300VAC2400W-2-17	
Input						
Voltage	90~265VAC					
Frequency	47~63Hz					
Phase	3 Phase, 4Wire+Groud/Y Connect					
Max.Current	20A		30A		40A	
Power Factor at 220VAC Input, Full	≥0.91, Active PFC					
Efficiency	>82% (Peak) >80% at 220VAC, 50Hz input/230VAC, 50Hz output)					
Output						
AC Power(Total) ⁽¹⁾	1080VA		1620VA		2160VA	
Max.Current (r.m.s) ⁽¹⁾	0~150V(L)	10.08A		15.12A		20.16A
	0~300V(H)	5.04A		7.56A		10.08A
Max.Current (Peak) ⁽¹⁾	0~150V(L)	58.32A		87.48A		116.64A
	0~300V(H)	29.16A		43.74A		58.32A
Voltage(AC)	Range	0~300VAC, 150V/300V/Auto				
	Resolution	0.1V				
	Accuracy	0.2% of setting + 0.8%F.S, at Voltage >3V				
Phase Angle (Starting /Ending)	Range	0~359.9°				
	Resolution	0.1°				
	Accuracy	±1° @45~65HZ				
Current OC Fold Mode	Range	0.1A				
	Resolution	2.0% of setting + 2.0%F.S.				
	Response Time	<1400ms				
Frequency	Range	15~1000HZ Full Range Adjust				
	Resolution	0.1Hz at 15.0~99.9Hz, 1Hz at 100~1000Hz				
	Accuracy	0.03% of setting				
Voltage(DC)	Range	0~424Vdc, 212V/424V/Auto				
	Resolution	0.1V				
	Accuracy	0.3% of setting + 0.8%F.S, at Voltage >3V				
Max.Current(L/H Range)(Total)	0~150V(L)	L 7.128A	L 10.692A	L 14.256A		
	0~300V(H)	H 3.402A	H 5.103A	H 6.804A		
Ripple & Noise(r.m.s)	L <1000mVrms @ Bandwidth 20HZ to 1MHZ					
	H <1500mVrms @ Bandwidth 20HZ to 1MHZ					
Ripple & Noise(Peak)	<4000mVp-p @ Bandwidth 20HZ to 1MHZ					
Other Parameters						
Total Harmonic Distortion(THD)	<0.5% (Resistive Load) at 15.0~70.0Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
	<1% (Resistive Load) at 70.1~500Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
	<1.5% (Resistive Load) at 501~1000Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
Crest Factor(CF)	≤6					
Load Regulation	± 0.5%F.S. @ 15~100HZ (Resistive Load)					
	± 0.8%F.S. @ Others Freq (Resistive Load)					
Line Regulation	± 0.1V					
Programmable Output Impedance	Not Support					
Harmonic & Interharmonics Simulation	Not Support					
Measurent(Master)						
Voltage	Range	AC 0~300VAC DC 0~424VDC				
	Resolution	0.1V				
	Accuracy	AC 0.2% of setting + 0.4%F.S. (Notes: Vpeak: 0.6% of setting+1%F.S.) DC 0.3% of setting + 0.4%F.S.				
Frequency	Range	15~1000HZ				
	Resolution	0.1Hz(15.0~99.9Hz), 1Hz(100~1000Hz)				
	Accuracy	0.1% of setting				
Current(r.m.s)	Range	H 0.15A~5.6A				
		M -				
		L 0.1A~3A				
		mA -				
	Resolution	0.01A				
Accuracy	0.4%+1.0%F.S					

SPS-300 Series AC Power Supply System

MODEL		SPS300VAC1200W-2-9	SPS300VAC1800W-2-9	SPS300VAC2400W-2-17
Current(Peak)	Range	0A~32.4A		
	Resolution	0.01A		
	Accuracy	0.4%+1.5%F.S.		
Power	Range	0~600W		
	Resolution	0.1W		
	Accuracy	0.4% of setting + 1%F.S. at PF>0.2, Voltage >5V		
Power Apparent (VA)	Range	0~612VA		
	Resolution	0.1VA		
	Accuracy	Voltage * I _{rms} , Calculated value		
Power Resistive (VAR)	Range	0~612VAR		
	Resolution	0.1VAR		
	Accuracy	$\sqrt{(VA)^2 - (W)^2}$, Calculated value		
Power Factor (PF)	Range	0.00~1.00		
	Resolution	0.01		
	Accuracy	W/VA, Calculated value		
Harmonic		Not Support		
Σ Current	Range ^[1]	H 0.15A~10.08A	H 0.15A~15.12A	H 0.15A~20.16A
		M -		
		L 0.1A~5.4A	L 0.1A~8.1A	L 0.1A~10.8A
	Resolution	0.01A		
	Accuracy	0.4%+1.0%F.S.		
Σ Current	Range ^[1]	0~1080W	0~1620W	0~2160W
	Resolution	0.1W		
	Accuracy	0.4% of setting + 0.3%F.S at PF >0.2, Voltage > 5V		
Extra Function				
Remote Sense	Range	5V(rms), Max. Total power less than rated power		
Slew Rate	Range	AC Voltage 0.001~1200.000V/ms and Disable		
		DC Voltage 0.001~1000.000V/ms and Disable		
		Frequency 0.001~1600.000HZ/ms and Disable		
Transient Generator(only for 15-70HZ)	Range	Trans-Start : 0.0~66.5ms@15Hz , Resolution : 0.1ms		
		Trans-Volt : -212V~+212V(L), -424V~+424V(H), Resolution : 0.1V		
		Trans-Time : 0.0~66.5ms@15Hz , Resolution : 0.1ms		
		Trans-Cycle : 0~9999, Constant		
Calibration ^[2]		Firmware-based calibration through the digital interface or front panel		
Graphic Display		4.3" Color touch LCD		
Operation Key Feature		Soft key, Numeric key, Rotary Knob, USB port for transfer and upgrading firmware		
Rack mount Handles		Yes		
FAN		Temperature Control		
Protection Circuits		OCP, OVP, OPP, OTP, RCP, PRI_UVP, PRI_OVP, PRI_OTP, PRI_OCP, USB_OCP		
Interface		Standard USB, RS-485, RS-232, GPIB & LAN is Optional		
Environment				
Operating Temperature		0°C~40°C		
Storage Temperature		-40°C~85°C		
Fan Noise		55dB Min; 76dB Max.	56.8dB Min; 77.8dB Max.	58dB Min; 79dB Max.
Altitude		2000m		
Relative Humidity		5%~95%, non-condensing		
Temperature Coefficient		100ppm/°C at Voltage, 300ppm/°C at Current, 100ppm/°C at Frequency		
Mechanical				
Dimensions(WxHxD)		540.0x400.0x640.0 mm	540.0x400.0x640.0 mm	560.0x754.0x700.0 mm
Package Dimensions(W x H x D)		660.0x710.0x760.0 mm	660.0x710.0x760.0 mm	680.0x1120.0x860.0 mm
Unit Weight		72.8kg	88.7kg	133.6kg
Shipping Weight		89.7kg	108.7kg	172.0kg
Regulatory Compliance				
CE Mark		Installation Overvoltage Category II; Class II equipment; indoor use only.		

[1] In parallel mode, the amount needed to be reduced to 90 %

[2] Calibration function only available for single unit.

All specifications are subject to change without notice.

SPS-300 Series AC Power Supply System

MODEL	SPS300VAC2000W-2-9		SPS300VAC3000W-2-9		SPS300VAC4000W-2-17	
Input						
Voltage	90~265VAC					
Frequency	47~63Hz					
Phase	3 Phase, 4Wire+Groud/Y Connect					
Max.Current	30A		45A		60A	
Power Factor at 220VAC Input, Full	≥0.95, Active PFC					
Efficiency	>86% (Peak)					
	>84% at 220VAC, 50Hz input/230VAC, 50Hz output)					
Output						
AC Power(Total) ⁽¹⁾	1800VA		2700VA		3600VA	
Max.Current (r.m.s) ⁽¹⁾	0~150V(L)	16.56A		24.84A		33.12A
	0~300V(H)	8.28A		12.42A		16.56A
Max.Current (Peak) ⁽¹⁾	0~150V(L)	99.36A		149.04A		198.72A
	0~300V(H)	49.68A		74.52A		99.36A
Voltage(AC)	Range	0~300VAC, 150V/300V/Auto				
	Resolution	0.1V				
	Accuracy	0.2% of setting + 0.8%F.S., at Voltage >3V				
Phase Angle (Starting /Ending)	Range	0~359.9°				
	Resolution	0.1°				
	Accuracy	±1° @45~65HZ				
Current OC Fold Mode	Range	0.1A				
	Resolution	2.0% of setting + 2.0%F.S.				
	Response Time	<1400ms				
Frequency	Range	15~1000HZ Full Range Adjust				
	Resolution	0.1Hz at 15.0~99.9Hz, 1Hz at 100~1000Hz				
	Accuracy	0.03% of setting				
Voltage(DC)	Range	0~424Vdc, 212V/424V/Auto				
	Resolution	0.1V				
	Accuracy	0.3% of setting + 0.8%F.S., at Voltage >3V				
Max.Current(L/H Range)(Total)	0~150V(L)	L 11.7A	L 17.55A	L 23.4A		
	0~300V(H)	H 5.94A	H 8.91A	H 11.88A		
Ripple & Noise(r.m.s)	L <1000mVrms @ Bandwidth 20HZ to 1MHZ					
	H <1500mVrms @ Bandwidth 20HZ to 1MHZ					
Ripple & Noise(Peak)	<4000mVp-p @ Bandwidth 20HZ to 1MHZ					
Other Parameters						
Total Harmonic Distortion(THD)	<0.5% (Resistive Load) at 15.0~70.0Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
	<1% (Resistive Load) at 70.1~500Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
	<1.5% (Resistive Load) at 501~1000Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
Crest Factor(CF)	≤6					
Load Regulation	± 0.5%F.S. @ 15~100HZ (Resistive Load)					
	± 0.8%F.S. @ Others Freq (Resistive Load)					
Line Regulation	± 0.1V					
Programmable Output Impedance	Not Support					
Harmonic & Interharmonics Simulation	Not Support					
Measurent(Master)						
Voltage	Range	AC 0~300VAC DC 0~424VDC				
	Resolution	0.1V				
	Accuracy	AC 0.2% of setting + 0.4%F.S. (Notes: Vpeak: 0.6% of setting+1%F.S.) DC 0.3% of setting + 0.4%F.S.				
Frequency	Range	15~1000HZ				
	Resolution	0.1Hz(15.0~99.9Hz), 1Hz(100~1000Hz)				
	Accuracy	0.1% of setting				
Current(r.m.s)	Range	H 0.15A~9.2A				
		M -				
		L 0.1A~3A				
		mA -				
	Resolution	0.01A				
Accuracy	0.4%+1.0%F.S					

SPS-300 Series AC Power Supply System

MODEL		SPS300VAC2000W-2-9	SPS300VAC3000W-2-9	SPS300VAC4000W-2-17	
Current(Peak)	Range	0A~55.2A			
	Resolution	0.01A			
	Accuracy	0.4%+1.5%F.S.			
Power	Range	0~1000W			
	Resolution	0.1W			
	Accuracy	0.4% of setting +1%F.S. at PF>0.2, Voltage >5V			
Power Apparent (VA)	Range	0~1020VA			
	Resolution	0.1VA			
	Accuracy	Voltage * I rms, Calculated value			
Power Resistive (VAR)	Range	0~1020VAR			
	Resolution	0.1VAR			
	Accuracy	$\sqrt{(VA)^2 - (W)^2}$, Calculated value			
Power Factor (PF)	Range	0.00~1.00			
	Resolution	0.01			
	Accuracy	W/VA, Calculated value			
Harmonic		Not Support			
Σ Current	Range ^[1]	H	0.15A~16.56A	H 0.15A~24.84A	H 0.15A~33.12A
		M	-		
		L	0.1A~5.4A	L 0.1A~8.1A	L 0.1A~10.8A
	Resolution	0.01A			
	Accuracy	0.4%+1.0%F.S.			
Σ Current	Range ^[1]	0~1800W	0~2700W	0~3600W	
	Resolution	0.1W			
	Accuracy	0.4% of setting +0.3%F.S at PF >0.2, Voltage > 5V			
Extra Function					
Remote Sense	Range	5V(rms), Max. Total power less than rated power			
Slew Rate	Range	AC Voltage 0.001~1200.000V/ms and Disable			
		DC Voltage 0.001~1000.000V/ms and Disable			
		Frequency 0.001~1600.000HZ/ms and Disable			
Transient Generator(only for 15-70HZ)	Range	Trans-Start : 0.0~66.5ms@15Hz , Resolution : 0.1ms			
		Trans-Volt : -212V~+212V(L), -424V~+424V(H), Resolution : 0.1V			
		Trans-Time : 0.0~66.5ms@15Hz , Resolution : 0.1ms			
		Trans-Cycle : 0~9999, Constant			
Calibration ^[2]	Firmware-based calibration through the digital interface or front panel				
Graphic Display	4.3" Color touch LCD				
Operation Key Feature	Soft key, Numeric key, Rotary Knob, USB port for transfer and upgrading firmware				
Rack mount Handles	Yes				
FAN	Temperature Control				
Protection Circuits	OCP, OVP, OPP, OTP, RCP, PRI_UVP, PRI_OVP, PRI_OTP, PRI_OCP, USB_OCP				
Interface	Standard USB, RS-485, RS-232, GPIB & LAN is Optional				
Environment					
Operating Temperature	0°C~40°C				
Storage Temperature	-40°C~85°C				
Fan Noise	55dB Min; 76dB Max.	56.8dB Min; 77.8dB Max.	58dB Min; 79dB Max.		
Altitude	2000m				
Relative Humidity	5%~95%, non-condensing				
Temperature Coefficient	100ppm/°C at Voltage, 300ppm/°C at Current, 100ppm/°C at Frequency				
Mechanical					
Dimensions(WxHxD)	540.0x400.0x640.0 mm	540.0x400.0x640.0 mm	560.0x754.0x700.0 mm		
Package Dimensions(W x H x D)	660.0x710.0x760.0 mm	680.0x710.0x760.0 mm	680.0x1120.0x860.0 mm		
Unit Weight	72.8kg	88.7kg	133.6kg		
Shipping Weight	89.7kg	108.7kg	172.0kg		
Regulatory Compliance					
CE Mark	Installation Overvoltage Category II; Class II equipment; indoor use only.				

[1] In parallel mode, the amount needed to be reduced to 90 %

[2] Calibration function only available for single unit.

All specifications are subject to change without notice.

SPS-300 Series AC Power Supply System

MODEL	SPS300VAC3000W-2-9		SPS300VAC4500W-2-9		SPS300VAC6000W-2-17	
Input						
Voltage	100~265VAC					
Frequency	47~63Hz					
Phase	3 Phase, 4Wire+Groud/Y Connect					
Max.Current	38A		57A		76A	
Power Factor at 220VAC Input, Full	≥0.97, Active PFC					
Efficiency	>87% (Peak)					
	>86% at 220VAC, 50Hz input/230VAC, 50Hz output)					
Output						
AC Power(Total) ¹⁾	2700VA		4050VA		5400VA	
Max.Current (r.m.s) ¹⁾	0~150V(L)	24.84A		37.26A		49.68A
	0~300V(H)	12.42A		18.63A		24.84A
Max.Current (Peak) ¹⁾	0~150V(L)	149.04A		223.56A		298.08A
	0~300V(H)	74.52A		111.78A		149.04A
Voltage(AC)	Range	0~300VAC, 150V/300V/Auto				
	Resolution	0.1V				
	Accuracy	0.2% of setting + 0.8%F.S, at Voltage >3V				
Phase Angle (Starting /Ending)	Range	0~359.9°				
	Resolution	0.1°				
	Accuracy	±1° @45~65HZ				
Current OC Fold Mode	Range	0.1A				
	Resolution	2.0% of setting + 2.0%F.S.				
	Response Time	<1400ms				
Frequency	Range	15~1000HZ Full Range Adjust				
	Resolution	0.1Hz at 15.0~99.9Hz, 1Hz at 100~1000Hz				
	Accuracy	0.03% of setting				
Voltage(DC)	Range	0~424Vdc, 212V/424V/Auto				
	Resolution	0.1V				
	Accuracy	0.3% of setting + 0.8%F.S, at Voltage >3V				
Max.Current(L/H Range)(Total)	0~150V(L)	L 17.568A		L 26.352A		L 35.136A
	0~300V(H)	H 8.784A		H 13.176A		H 17.568A
Ripple & Noise(r.m.s)	L <1000mVrms @ Bandwidth 20HZ to 1MHZ					
	H <1500mVrms @ Bandwidth 20HZ to 1MHZ					
Ripple & Noise(Peak)	<4000mVp-p @ Bandwidth 20HZ to 1MHZ					
Other Parameters						
Total Harmonic Distortion(THD)	<0.5% (Resistive Load) at 15.0~70.0Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
	<1% (Resistive Load) at 70.1~500Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
	<1.5% (Resistive Load) at 501~1000Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
Crest Factor(CF)	≤6					
Load Regulation	± 0.5%F.S. @ 15~100HZ (Resistive Load)					
	± 0.8%F.S. @ Others Freq (Resistive Load)					
Line Regulation	± 0.1V					
Programmable Output Impedance	Not Support					
Harmonic & Interharmonics Simulation	Not Support					
Measurent(Master)						
Voltage	Range	AC 0~300VAC DC 0~424VDC				
	Resolution	0.1V				
	Accuracy	AC 0.2% of setting + 0.4%F.S. (Notes: Vpeak: 0.6% of setting+1%F.S.) DC 0.3% of setting + 0.4%F.S.				
Frequency	Range	15~1000HZ				
	Resolution	0.1Hz(15.0~99.9Hz), 1Hz(100~1000Hz)				
	Accuracy	0.1% of setting				
Current(r.m.s)	Range	H 0.15A~ 13.8A				
		M -				
		L 0.1A ~ 3A				
		mA -				
	Resolution	0.01A				
Accuracy	0.4%+1.0%F.S					

SPS-300 Series AC Power Supply System

MODEL		SPS300VAC3000W-2-9	SPS300VAC4500W-2-9	SPS300VAC6000W-2-17
Current(Peak)	Range	0A~82.8A		
	Resolution	0.01A		
	Accuracy	0.4%+1.5%F.S.		
Power	Range	0~1500W		
	Resolution	0.1W		
	Accuracy	0.4% of setting +1%F.S. at PF>0.2, Voltage >5V		
Power Apparent (VA)	Range	0~1530VA		
	Resolution	0.1VA		
	Accuracy	Voltage * Irms, Calculated value		
Power Resistive (VAR)	Range	0~1530VAR		
	Resolution	0.1VAR		
	Accuracy	$\sqrt{(VA)^2 - (W)^2}$, Calculated value		
Power Factor (PF)	Range	0.00~1.00		
	Resolution	0.01		
	Accuracy	W/VA, Calculated value		
Harmonic		Not Support		
Σ Current	Range ^[1]	H 0.15A~24.84A	H 0.15A~37.26A	H 0.15A~49.68A
		M -		
		L 0.1A~5.4A	L 0.1A~8.1A	L 0.1A~10.8A
	Resolution	0.01A		
	Accuracy	0.4%+1.0%F.S.		
Σ Current	Range ^[1]	0~2700W	0~4050W	0~5400W
	Resolution	0.1W		
	Accuracy	0.4% of setting +0.3%F.S at PF >0.2, Voltage > 5V		
Extra Function				
Remote Sense	Range	5V(rms), Max. Total power less than rated power		
Slew Rate	Range	AC Voltage 0.001~1200.000V/ms and Disable		
		DC Voltage 0.001~1000.000V/ms and Disable		
		Frequency 0.001~1600.000HZ/ms and Disable		
Transient Generator(only for 15-70HZ)	Range	Trans-Start : 0.0~66.5ms@15Hz , Resolution : 0.1ms		
		Trans-Volt : -212V~+212V(L), -424V~+424V(H), Resolution : 0.1V		
		Trans-Time : 0.0~66.5ms@15Hz , Resolution : 0.1ms		
		Trans-Cycle : 0~9999, Constant		
Calibration ^[2]		Firmware-based calibration through the digital interface or front panel		
Graphic Display		4.3" Color touch LCD		
Operation Key Feature		Soft key, Numeric key, Rotary Knob, USB port for transfer and upgrading firmware		
Rack mount Handles		Yes		
FAN		Temperature Control		
Protection Circuits		OCP, OVP, OPP, OTP, RCP, PRI_UVP, PRI_OVP, PRI_OTP, PRI_OCP, USB_OCP		
Interface		Standard USB, RS-485, RS-232, GPIB & LAN is Optional		
Environment				
Operating Temperature		0°C~40°C		
Storage Temperature		-40°C~85°C		
Fan Noise		55dB Min; 76dB Max.	56.8dB Min; 77.8dB Max.	58dB Min; 79dB Max.
Altitude		2000m		
Relative Humidity		5%~95%, non-condensing		
Temperature Coefficient		100ppm/°C at Voltage, 300ppm/°C at Current, 100ppm/°C at Frequency		
Mechanical				
Dimensions(WxHxD)		540.0x400.0x640.0 mm	540.0x400.0x640.0 mm	560.0x754.0x700.0 mm
Package Dimensions(W x H x D)		660.0x710.0x760.0 mm	660.0x710.0x760.0 mm	680.0x1120.0x860.0 mm
Unit Weight		72.8kg	88.7kg	133.6kg
Shipping Weight		89.7kg	108.7kg	172.0kg
Regulatory Compliance				
CE Mark		Installation Overvoltage Category II; Class II equipment; indoor use only.		

[1] In parallel mode, the amount needed to be reduced to 90 %

[2] Calibration function only available for single unit.

All specifications are subject to change without notice.

SPS-300 Series AC Power Supply System

MODEL		SPS300VAC4000W-3-17		SPS300VAC6000W-3-17		SPS300VAC8000W-3-17	
Input							
Voltage		190~265VAC					
Frequency		47~63Hz					
Phase		3 Phase, 4Wire+Groud/Y Connect					
Max.Current		28A		42A		56A	
Power Factor at 220VAC Input, Full		≥0.99, Active PFC					
Efficiency		>87% (Peak) >86% at 220VAC, 50Hz input/230VAC, 50Hz output)					
Output							
AC Power(Total) ⁽¹⁾		3600VA		5400VA		7200VA	
Max.Current (r.m.s) ⁽¹⁾	0~150V(L)	28.8A		43.2A		57.6A	
	0~300V(H)	14.4A		21.6A		28.8A	
Max.Current (Peak) ⁽¹⁾	0~150V(L)	144A		216A		288A	
	0~300V(H)	72A		108A		144A	
Voltage(AC)	Range	0~300VAC, 150V/300V/Auto					
	Resolution	0.1V					
	Accuracy	0.2% of setting + 0.8%F.S, at Voltage >3V					
Phase Angle (Starting /Ending)	Range	0~359.9°					
	Resolution	0.1°					
	Accuracy	±1° @45~65HZ					
Current OC Fold Mode	Range	0.1A					
	Resolution	2.0% of setting + 2.0%F.S.					
	Response Time	<1400ms					
Frequency	Range	15~1000HZ Full Range Adjust					
	Resolution	0.1Hz at 15.0~99.9Hz, 1Hz at 100~1000Hz					
	Accuracy	0.03% of setting					
Voltage(DC)	Range	0~424Vdc, 212V/424V/Auto					
	Resolution	0.1V					
	Accuracy	0.3% of setting + 0.8%F.S, at Voltage >3V					
Max.Current(L/H Range)(Total)	0~150V(L)	L 20.34A		L 30.51A		L 40.68A	
	0~300V(H)	H 10.17A		H 15.255A		H 20.34A	
Ripple & Noise(r.m.s)	L <1000mVrms @ Bandwidth 20HZ to 1MHZ						
	H <1500mVrms @ Bandwidth 20HZ to 1MHZ						
Ripple & Noise(Peak)	<4000mVp-p @ Bandwidth 20HZ to 1MHZ						
Other Parameters							
Total Harmonic Distortion(THD)	<0.5% (Resistive Load) at 15.0~70.0Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range						
	<1% (Resistive Load) at 70.1~500Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range						
	<1.5% (Resistive Load) at 501~1000Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range						
Crest Factor(CF)	≤5						
Load Regulation	± 0.5%F.S. @ 15~100HZ (Resistive Load)						
	± 0.8%F.S. @ Others Freq (Resistive Load)						
Line Regulation	± 0.1V						
Programmable Output Impedance	Not Support						
Harmonic & Interharmonics Simulation	Not Support						
Measurent(Master)							
Voltage	Range	AC 0~300VAC DC 0~424VDC					
	Resolution	0.1V					
	Accuracy	AC 0.2% of setting + 0.4%F.S. (Notes: Vpeak: 0.6% of setting+1%F.S.) DC 0.3% of setting + 0.4%F.S.					
Frequency	Range	15~1000HZ					
	Resolution	0.1Hz(15.0~99.9Hz), 1Hz(100~1000Hz)					
	Accuracy	0.1% of setting					
Current(r.m.s)	Range	H 0.15A~20A					
		M -					
		L 0.1A~5A					
		mA 0.02~1.5A					
	Resolution	0.01A					
Accuracy	0.4%+1.0%F.S						

SPS-300 Series AC Power Supply System

MODEL		SPS300VAC4000W-3-17	SPS300VAC6000W-3-17	SPS300VAC8000W-3-17
Current(Peak)	Range	0A~81.5A		
	Resolution	0.01A		
	Accuracy	0.4%+1.5%F.S.		
Power	Range	0~2040W		
	Resolution	0.1W		
	Accuracy	0.4% of setting +1%F.S. at PF>0.2, Voltage >5V		
Power Apparent (VA)	Range	0~2040VA		
	Resolution	0.1VA		
	Accuracy	Voltage * I _{rms} , Calculated value		
Power Resistive (VAR)	Range	0~2040VAR		
	Resolution	0.1VAR		
	Accuracy	$\sqrt{(VA)^2-(W)^2}$, Calculated value		
Power Factor (PF)	Range	0.00~1.00		
	Resolution	0.01		
	Accuracy	W/VA, Calculated value		
Harmonic		Not Support		
Σ Current	Range ^[1]	H 0.15A~28.8A	H 0.15A~43.2A	H 0.15A~57.6A
		M -		
		L 0.1A~9A	L 0.1A~13.5A	L 0.1A~18A
		mA 0.02~2.7A	mA 0.02~4.05A	mA 0.02~5.4A
	Resolution	0.01A		
Accuracy	0.4%+1.0%F.S.			
Σ Current	Range ^[1]	0~3762W	0~5508W	0~7344W
	Resolution	0.1W		
	Accuracy	0.4% of setting +0.3%F.S at PF >0.2, Voltage > 5V		
Extra Function				
Remote Sense	Range	5V(rms), Max. Total power less than rated power		
Slew Rate	Range	AC Voltage 0.001~1200.000V/ms and Disable		
		DC Voltage 0.001~1000.000V/ms and Disable		
		Frequency 0.001~1600.000HZ/ms and Disable		
Transient Generator(only for 15-70HZ)	Range	Trans-Start : 0.0~66.5ms@15Hz , Resolution : 0.1ms		
		Trans-Volt : -212V~+212V(L), -424V~+424V(H), Resolution : 0.1V		
		Trans-Time : 0.0~66.5ms@15Hz , Resolution : 0.1ms		
		Trans-Cycle : 0~9999, Constant		
Calibration ^[2]		Firmware-based calibration through the digital interface or front panel		
Graphic Display		4.3" Color touch LCD		
Operation Key Feature		Soft key, Numeric key, Rotary Knob, USB port for transfer and upgrading firmware		
Rack mount Handles		Yes		
FAN		Temperature Control		
Protection Circuits		OCP, OVP, OPP, OTP, RCP, PRI_UVP, PRI_OVP, PRI_OTP, PRI_OCP, USB_OCP		
Interface		Standard USB, RS-485, RS-232, GPIB & LAN is Optional		
Environment				
Operating Temperature		0°C~40°C		
Storage Temperature		-40°C~85°C		
Fan Noise		55dB Min; 76dB Max.	56.8dB Min; 77.8dB Max.	58dB Min; 79dB Max.
Altitude		2000m		
Relative Humidity		5%~95%, non-condensing		
Temperature Coefficient		100ppm/°C at Voltage, 300ppm/°C at Current, 100ppm/°C at Frequency		
Mechanical				
Dimensions(WxHxD)		560.0x754.0x700.0 mm	560.0x754.0x700.0 mm	560.0x754.0x700.0 mm
Package Dimensions(W x H x D)		680.0x1146.0x820.0 mm	680.0x1146.0x820.0 mm	680.0x1120.0x860.0 mm
Unit Weight		112.6kg	134.0kg	155.6kg
Shipping Weight		148.6kg	173.0kg	194.0kg
Regulatory Compliance				
CE Mark		Installation Overvoltage Category II; Class II equipment; indoor use only.		

[1]In parallel mode, the amount needed to be reduced to 90 %

[2]Calibration function only available for single unit.

All specifications are subject to change without notice.

SPS-300 Series AC Power Supply System

MODEL	SPS300VAC6000W-4-17		SPS300VAC9000W-4-17		SPS300VAC12000W-4-21	
Input						
Voltage	190~265VAC					
Frequency	47~63Hz					
Phase	3 Phase, 4Wire+Groud/Y Connect					
Max.Current	40A		60A		80A	
Power Factor at 220VAC Input, Full	≥0.98, Active PFC					
Efficiency	>86% (Peak)					
	>85% at 220VAC, 50Hz input/230VAC, 50Hz output)					
Output						
AC Power(Total) ⁽¹⁾	5400VA		8100VA		10800VA	
Max.Current (r.m.s) ⁽¹⁾	0~150V(L)	49.68A		74.52A		99.36A
	0~300V(H)	24.84A		37.26A		49.68A
Max.Current (Peak) ⁽¹⁾	0~150V(L)	298.08A		447.12A		596.16A
	0~300V(H)	149.04A		223.56A		298.08A
Voltage(AC)	Range	0~300VAC, 150V/300V/Auto				
	Resolution	0.1V				
	Accuracy	0.2% of setting + 0.8%F.S., at Voltage >3V				
Phase Angle (Starting /Ending)	Range	0~359.9°				
	Resolution	0.1°				
	Accuracy	±1° @45~65HZ				
Current OC Fold Mode	Range	0.1A				
	Resolution	2.0% of setting + 2.0%F.S.				
	Response Time	<1400ms				
Frequency	Range	15~1000HZ Full Range Adjust				
	Resolution	0.1Hz at 15.0~99.9Hz, 1Hz at 100~1000Hz				
	Accuracy	0.03% of setting				
Voltage(DC)	Range	0~424Vdc, 212V/424V/Auto				
	Resolution	0.1V				
	Accuracy	0.3% of setting + 0.8%F.S., at Voltage >3V				
Max.Current(L/H Range)(Total)	0~150V(L)	L 35.28A		L 52.92A		L 70.56A
	0~300V(H)	H 17.64A		H 26.46A		H 35.28A
Ripple & Noise(r.m.s)	L <1000mVrms @ Bandwidth 20HZ to 1MHZ					
	H <1500mVrms @ Bandwidth 20HZ to 1MHZ					
Ripple & Noise(Peak)	<4000mVp-p @ Bandwidth 20HZ to 1MHZ					
Other Parameters						
Total Harmonic Distortion(THD)	<0.5% (Resistive Load) at 15.0~70.0Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
	<1% (Resistive Load) at 70.1~500Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
	<1.5% (Resistive Load) at 501~1000Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
Crest Factor(CF)	≤6					
Load Regulation	± 0.5%F.S. @ 15~100HZ (Resistive Load)					
	± 0.8%F.S. @ Others Freq (Resistive Load)					
Line Regulation	± 0.1V					
Programmable Output Impedance	Not Support					
Harmonic & Interharmonics Simulation	Not Support					
Measurent(Master)						
Voltage	Range	AC 0~300VAC DC 0~424VDC				
	Resolution	0.1V				
	Accuracy	AC 0.2% of setting + 0.4%F.S. (Notes: Vpeak: 0.6% of setting+1%F.S.) DC 0.3% of setting + 0.4%F.S.				
Frequency	Range	15~1000HZ				
	Resolution	0.1Hz(15.0~99.9Hz), 1Hz(100~1000Hz)				
	Accuracy	0.1% of setting				
Current(r.m.s)	Range	H 0.3A~27.6A				
		M 0.2A~20A				
		L 0.1A~5A				
		mA 0.02~1.5A				
	Resolution	0.01A				
Accuracy	0.4%+1.0%F.S					

SPS-300 Series AC Power Supply System

MODEL		SPS300VAC6000W-4-17	SPS300VAC9000W-4-17	SPS300VAC12000W-4-21
Current(Peak)	Range	0A~168.6A		
	Resolution	0.01A		
	Accuracy	0.4%+1.5%F.S.		
Power	Range	0~3060W		
	Resolution	0.1W		
	Accuracy	0.4% of setting +1%F.S. at PF>0.2, Voltage >5V		
Power Apparent (VA)	Range	0~3060VA		
	Resolution	0.1VA		
	Accuracy	Voltage * I _{rms} , Calculated value		
Power Resistive (VAR)	Range	0~3060VAR		
	Resolution	0.1VAR		
	Accuracy	$\sqrt{(VA)^2 - (W)^2}$, Calculated value		
Power Factor (PF)	Range	0.00~1.00		
	Resolution	0.01		
	Accuracy	W/VA, Calculated value		
Harmonic		Not Support		
Σ Current	Range ^[1]	H 0.3A~49.68A	H 0.3A~74.52A	H 0.3A~99.36A
		M 0.2A~36A	M 0.2A~54A	M 0.2A~72A
		L 0.1A~9A	L 0.1A~13.5A	L 0.1A~18A
		mA 0.02~2.7A	mA 0.02~4.05A	mA 0.02~5.4A
	Resolution	0.01A		
Accuracy	0.4%+1.0%F.S.			
Σ Current	Range ^[1]	0~5508W	0~8262W	0~11016W
	Resolution	0.1W		
	Accuracy	0.4% of setting +0.3%F.S at PF >0.2, Voltage > 5V		
Extra Function				
Remote Sense	Range	5V(rms), Max. Total power less than rated power		
Slew Rate	Range	AC Voltage 0.001~1200.000V/ms and Disable		
		DC Voltage 0.001~1000.000V/ms and Disable		
		Frequency 0.001~1600.000HZ/ms and Disable		
Transient Generator(only for 15-70HZ)	Range	Trans-Start : 0.0~66.5ms@15Hz , Resolution : 0.1ms		
		Trans-Volt : -212V~+212V(L), -424V~+424V(H), Resolution : 0.1V		
		Trans-Time : 0.0~66.5ms@15Hz , Resolution : 0.1ms		
		Trans-Cycle : 0~9999, Constant		
Calibration ^[2]	Firmware-based calibration through the digital interface or front panel			
Graphic Display	4.3" Color touch LCD			
Operation Key Feature	Soft key, Numeric key, Rotary Knob, USB port for transfer and upgrading firmware			
Rack mount Handles	Yes			
FAN	Temperature Control			
Protection Circuits	OCP, OVP, OPP, OTP, RCP, PRI_UVP, PRI_OVP, PRI_OTP, PRI_OCP, USB_OCP			
Interface	Standard USB, RS-485, RS-232, GPIB & LAN is Optional			
Environment				
Operating Temperature	0°C~40°C			
Storage Temperature	-40°C~85°C			
Fan Noise	55dB Min; 76dB Max.	56.8dB Min; 77.8dB Max.	58dB Min; 79dB Max.	
Altitude	2000m			
Relative Humidity	5%~95%, non-condensing			
Temperature Coefficient	100ppm/°C at Voltage, 300ppm/°C at Current, 100ppm/°C at Frequency			
Mechanical				
Dimensions(WxHxD)	560.0x754.0x700.0 mm	560.0x754.0x700.0 mm	560.0x932.0x700.0 mm	
Package Dimensions(W x H x D)	680.0x1146.0x820.0 mm	680.0x1146.0x820.0 mm	680.0x1297.0x820.0 mm	
Unit Weight	128.0kg	157.0kg	224kg	
Shipping Weight	163.0kg	195.0kg	265kg	
Regulatory Compliance				
CE Mark	Installation Overvoltage Category II; Class II equipment; indoor use only.			

[1]In parallel mode, the amount needed to be reduced to 90 %

[2]Calibration function only available for single unit.

All specifications are subject to change without notice.

SPS-300 Series AC Power Supply System

MODEL	SPS300VAC8000W-4-17		SPS300VAC12000W-4-17		SPS300VAC16000W-4-21	
Input						
Voltage	190~265VAC					
Frequency	47~63Hz					
Phase	3 Phase, 4Wire+Groud/Y Connect					
Max.Current	50A		70A		100A	
Power Factor at 220VAC Input, Full	≥0.99, Active PFC					
Efficiency	>87% (Peak)					
	>86% at 220VAC, 50Hz input/230VAC, 50Hz output)					
Output						
AC Power(Total) ⁽¹⁾	7200VA		10800VA		14400VA	
Max.Current (r.m.s) ⁽¹⁾	0~150V(L)	57.6A	86.4A		115.2A	
	0~300V(H)	28.8A	43.2A		57.6A	
Max.Current (Peak) ⁽¹⁾	0~150V(L)	288A	432A		576A	
	0~300V(H)	144A	216A		288A	
Voltage(AC)	Range	0~300VAC, 150V/300V/Auto				
	Resolution	0.1V				
	Accuracy	0.2% of setting + 0.8%F.S., at Voltage >3V				
Phase Angle (Starting /Ending)	Range	0~359.9°				
	Resolution	0.1°				
	Accuracy	±1° @45~65HZ				
Current OC Fold Mode	Range	0.1A				
	Resolution	2.0% of setting + 2.0%F.S.				
	Response Time	<1400ms				
Frequency	Range	15~1000HZ Full Range Adjust				
	Resolution	0.1Hz at 15.0~99.9Hz, 1Hz at 100~1000Hz				
	Accuracy	0.03% of setting				
Voltage(DC)	Range	0~424Vdc, 212V/424V/Auto				
	Resolution	0.1V				
	Accuracy	0.3% of setting + 0.8%F.S., at Voltage >3V				
Max.Current(L/H Range)(Total)	0~150V(L)	L 40.68A	L 61.02A		L 81.36A	
	0~300V(H)	H 20.34A	H 30.51A		H 40.68A	
Ripple & Noise(r.m.s)	L <1000mVrms @ Bandwidth 20HZ to 1MHZ					
	H <1500mVrms @ Bandwidth 20HZ to 1MHZ					
Ripple & Noise(Peak)	<4000mVp-p @ Bandwidth 20HZ to 1MHZ					
Other Parameters						
Total Harmonic Distortion(THD)	<0.5% (Resistive Load) at 15.0~70.0Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
	<1% (Resistive Load) at 70.1~500Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
	<1.5% (Resistive Load) at 501~1000Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
Crest Factor(CF)	≤5					
Load Regulation	± 0.5%F.S. @ 15~100HZ (Resistive Load)					
	± 0.8%F.S. @ Others Freq (Resistive Load)					
Line Regulation	± 0.1V					
Programmable Output Impedance	Not Support					
Harmonic & Interharmonics Simulation	Not Support					
Measurent(Master)						
Voltage	Range	AC 0~300VAC DC 0~424VDC				
	Resolution	0.1V				
	Accuracy	AC 0.2% of setting + 0.4%F.S. (Notes: Vpeak: 0.6% of setting+1%F.S.) DC 0.3% of setting + 0.4%F.S.				
Frequency	Range	15~1000HZ				
	Resolution	0.1Hz(15.0~99.9Hz), 1Hz(100~1000Hz)				
	Accuracy	0.1% of setting				
Current(r.m.s)	Range	H 0.3A~32A				
		M 0.2A~20A				
		L 0.1A~5A				
		mA 0.02~1.5A				
	Resolution	0.01A				
Accuracy	0.4%+1.0%F.S					

SPS-300 Series AC Power Supply System

MODEL		SPS300VAC8000W-4-17	SPS300VAC12000W-4-17	SPS300VAC16000W-4-21
Current(Peak)	Range	0.05A~163A		
	Resolution	0.01A		
	Accuracy	0.4%+1.5%F.S.		
Power	Range	0~4080W		
	Resolution	0.1W		
	Accuracy	0.4% of setting +1%F.S. at PF>0.2, Voltage >5V		
Power Apparent (VA)	Range	0~4080VA		
	Resolution	0.1VA		
	Accuracy	Voltage * I _{rms} , Calculated value		
Power Resistive (VAR)	Range	0~4080VAR		
	Resolution	0.1VAR		
	Accuracy	$\sqrt{(VA)^2 - (W)^2}$, Calculated value		
Power Factor (PF)	Range	0.00~1.00		
	Resolution	0.01		
	Accuracy	W/VA, Calculated value		
Harmonic		Not Support		
Σ Current	Range ^[1]	H 0.3A~57.6A	H 0.3A~86.4A	H 0.3A~115.2A
		M 0.2A~36A	M 0.2A~54A	M 0.2A~72A
		L 0.1A~9A	L 0.1A~13.5A	L 0.1A~18A
		mA 0.02~2.7A	mA 0.02~4.05A	mA 0.02~5.4A
	Resolution	0.01A		
Accuracy	0.4%+1.0%F.S.			
Σ Current	Range ^[1]	0~7344W	0~11016W	0~14688W
	Resolution	0.1W		
	Accuracy	0.4% of setting +0.3%F.S at PF >0.2, Voltage > 5V		
Extra Function				
Remote Sense	Range	5V(rms), Max. Total power less than rated power		
Slew Rate	Range	AC Voltage 0.001~1200.000V/ms and Disable		
		DC Voltage 0.001~1000.000V/ms and Disable		
		Frequency 0.001~1600.000HZ/ms and Disable		
Transient Generator(only for 15-70HZ)	Range	Trans-Start : 0.0~66.5ms@15Hz , Resolution : 0.1ms		
		Trans-Volt : -212V~+212V(L), -424V~+424V(H), Resolution : 0.1V		
		Trans-Time : 0.0~66.5ms@15Hz , Resolution : 0.1ms		
		Trans-Cycle : 0~9999, Constant		
Calibration ^[2]	Firmware-based calibration through the digital interface or front panel			
Graphic Display	4.3" Color touch LCD			
Operation Key Feature	Soft key, Numeric key, Rotary Knob, USB port for transfer and upgrading firmware			
Rack mount Handles	Yes			
FAN	Temperature Control			
Protection Circuits	OCP, OVP, OPP, OTP, RCP, PRI_UVP, PRI_OVP, PRI_OTP, PRI_OCP, USB_OCP			
Interface	Standard USB, RS-485, RS-232, GPIB & LAN is Optional			
Environment				
Operating Temperature	0°C~40°C			
Storage Temperature	-40°C~85°C			
Fan Noise	55dB Min; 76dB Max.	56.8dB Min; 77.8dB Max.	58dB Min; 79dB Max.	
Altitude	2000m			
Relative Humidity	5%~95%, non-condensing			
Temperature Coefficient	100ppm/°C at Voltage, 300ppm/°C at Current, 100ppm/°C at Frequency			
Mechanical				
Dimensions(WxHxD)	560.0x754.0x700.0 mm	560.0x754.0x700.0 mm	560.0x932.0x700.0 mm	
Package Dimensions(W xHxD)	680.0x1146.0x820.0 mm	680.0x1146.0x820.0 mm	680.0x1297.0x820.0 mm	
Unit Weight	128.0kg	157.0kg	224kg	
Shipping Weight	163.0kg	195.0kg	265.0kg	
Regulatory Compliance				
CE Mark	Installation Overvoltage Category II; Class II equipment; indoor use only.			

[1]In parallel mode, the amount needed to be reduced to 90 %

[2]Calibration function only available for single unit.

All specifications are subject to change without notice.

SPS-300 Series AC Power Supply System

MODEL	SPS300VAC10000W-4-17		SPS300VAC15000W-4-17		SPS300VAC20000W-4-21	
Input						
Voltage	190~265VAC					
Frequency	47~63Hz					
Phase	3 Phase, 4Wire+Groud/Y Connect					
Max.Current	60A		90A		120A	
Power Factor at 220VAC Input, Full	≥0.99, Active PFC					
Efficiency	>87% (Peak)					
	>86% at 220VAC, 50Hz input/230VAC, 50Hz output)					
Output						
AC Power(Total) ⁽¹⁾	9000VA		13500VA		18000VA	
Max.Current (r.m.s) ⁽¹⁾	0~150V(L)	82.8A		124.2A		165.6A
	0~300V(H)	41.4A		62.1A		82.8A
Max.Current (Peak) ⁽¹⁾	0~150V(L)	331.2A		496.8A		662.4A
	0~300V(H)	165.6A		248.4A		331.2A
Voltage(AC)	Range	0~300VAC, 150V/300V/Auto				
	Resolution	0.1V				
	Accuracy	0.2% of setting + 0.8%F.S, at Voltage >3V				
Phase Angle (Starting /Ending)	Range	0~359.9°				
	Resolution	0.1°				
	Accuracy	±1° @45~65HZ				
Current OC Fold Mode	Range	0.1A				
	Resolution	2.0% of setting + 2.0%F.S.				
	Response Time	<1400ms				
Frequency	Range	15~1000HZ Full Range Adjust				
	Resolution	0.1Hz at 15.0~99.9Hz, 1Hz at 100~1000Hz				
	Accuracy	0.03% of setting				
Voltage(DC)	Range	0~424Vdc, 212V/424V/Auto				
	Resolution	0.1V				
	Accuracy	0.3% of setting + 0.8%F.S, at Voltage >3V				
Max.Current(L/H Range)(Total)	0~150V(L)	L 58.68A		L 88.02A		L 117.36A
	0~300V(H)	H 29.34A		H 44.01A		H 58.68A
Ripple & Noise(r.m.s)	L <1000mVrms @ Bandwidth 20HZ to 1MHZ					
	H <1500mVrms @ Bandwidth 20HZ to 1MHZ					
Ripple & Noise(Peak)	<4000mVp-p @ Bandwidth 20HZ to 1MHZ					
Other Parameters						
Total Harmonic Distortion(THD)	<0.5% (Resistive Load) at 15.0~70.0Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
	<1% (Resistive Load) at 70.1~500Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
	<1.5% (Resistive Load) at 501~1000Hz and output voltage within the 80~140VAC at Low Range or the 160~280VAC at High Range					
Crest Factor(CF)	≤4					
Load Regulation	± 0.5%F.S. @15~100HZ (Resistive Load)					
	± 0.8%F.S. @ Others Freq (Resistive Load)					
Line Regulation	± 0.1V					
Programmable Output Impedance	Not Support					
Harmonic & Interharmonics Simulation	Not Support					
Measurent(Master)						
Voltage	Range	AC 0~300VAC DC 0~424VDC				
	Resolution	0.1V				
	Accuracy	AC 0.2% of setting + 0.4%F.S. (Notes: Vpeak: 0.6% of setting+1%F.S.) DC 0.3% of setting + 0.4%F.S.				
Frequency	Range	15~1000HZ				
	Resolution	0.1Hz(15.0~99.9Hz), 1Hz(100~1000Hz)				
	Accuracy	0.1% of setting				
Current(r.m.s)	Range	H 0.3A~46A				
		M 0.2A~20A				
		L 0.1A~5A				
		mA 0.02~1.5A				
	Resolution	0.01A				
Accuracy	0.4%+1.0%F.S					


SPS-300 Series AC Power Supply System

MODEL		SPS300VAC10000W-4-17	SPS300VAC15000W-4-17	SPS300VAC20000W-4-21
Current(Peak)	Range	0.05A~188A		
	Resolution	0.01A		
	Accuracy	0.4%+1.5%F.S.		
Power	Range	0~5100W		
	Resolution	0.1W		
	Accuracy	0.4% of setting +1%F.S. at PF>0.2, Voltage >5V		
Power Apparent (VA)	Range	0~5100VA		
	Resolution	0.1VA		
	Accuracy	Voltage * I _{rms} , Calculated value		
Power Resistive (VAR)	Range	0~5100VAR		
	Resolution	0.1VAR		
	Accuracy	$\sqrt{(VA)^2 - (W)^2}$, Calculated value		
Power Factor (PF)	Range	0.00~1.00		
	Resolution	0.01		
	Accuracy	W/VA, Calculated value		
Harmonic		Not Support		
Σ Current	Range ^[1]	H 0.3A~82.8A	H 0.3A~124.2A	H 0.3A~165.6A
		M 0.2A~36A	M 0.2A~54A	M 0.2A~72A
		L 0.1A~9A	L 0.1A~13.5A	L 0.1A~18A
		mA 0.02~2.7A	mA 0.02~4.05A	mA 0.02~5.4A
	Resolution	0.01A		
Accuracy	0.4%+1.0%F.S.			
Σ Current	Range ^[1]	0~9180W	0~13770W	0~18360W
	Resolution	0.1W		
	Accuracy	0.4% of setting +0.3%F.S at PF >0.2, Voltage > 5V		
Extra Function				
Remote Sense	Range	5V(rms), Max. Total power less than rated power		
Slew Rate	Range	AC Voltage 0.001~1200.000V/ms and Disable		
		DC Voltage 0.001~1000.000V/ms and Disable		
		Frequency 0.001~1600.000HZ/ms and Disable		
Transient Generator(only for 15-70HZ)	Range	Trans-Start : 0.0~66.5ms@15Hz , Resolution : 0.1ms		
		Trans-Volt : -212V~+212V(L), -424V~+424V(H), Resolution : 0.1V		
		Trans-Time : 0.0~66.5ms@15Hz , Resolution : 0.1ms		
		Trans-Cycle : 0~9999, Constant		
Calibration ^[2]	Firmware-based calibration through the digital interface or front panel			
Graphic Display	4.3" Color touch LCD			
Operation Key Feature	Soft key, Numeric key, Rotary Knob, USB port for transfer and upgrading firmware			
Rack mount Handles	Yes			
FAN	Temperature Control			
Protection Circuits	OCP, OVP, OPP, OTP, RCP, PRI_UVP, PRI_OVP, PRI_OTP, PRI_OCP, USB_OCP			
Interface	Standard USB, RS-485, RS-232, GPIB & LAN is Optional			
Environment				
Operating Temperature	0°C~40°C			
Storage Temperature	-40°C~85°C			
Fan Noise	55dB Min; 76dB Max.	56.8dB Min; 77.8dB Max.	58dB Min; 79dB Max.	
Altitude	2000m			
Relative Humidity	5%~95%, non-condensing			
Temperature Coefficient	100ppm/°C at Voltage, 300ppm/°C at Current, 100ppm/°C at Frequency			
Mechanical				
Dimensions(WxHxD)	560.0x754.0x700.0 mm	560.0x754.0x700.0 mm	560.0x932.0x700.0 mm	
Package Dimensions(W xHxD)	680.0x1146.0x820.0 mm	680.0x1146.0x820.0 mm	680.0x1297.0x820.0 mm	
Unit Weight	128.0kg	157.0kg	224.0kg	
Shipping Weight	163.0kg	195.0kg	265kg	
Regulatory Compliance				
CE Mark	Installation Overvoltage Category II; Class II equipment; indoor use only.			

[1]In parallel mode, the amount needed to be reduced to 90 %

[2]Calibration function only available for single unit.

All specifications are subject to change without notice.



APM Technologies Ltd

Add: #7, Link Industry Park, Kechuang Road, Nancheng,
Dongguan, Guangdong, China

Tel: +86 769-2202 8588 ext: 2892 Fax: +86 769-2202 6771

E-mail: overseas@apmtech.cn Web: www.apmtechate.com



Scan the QR code for more information