

THE NEW GLOBAL POWER FOR
ELECTROMAGNETIC COMPATIBILITY.

THE WORLD'S SPEED IS OUR BEAT

AMETEK
COMPLIANCE TEST SOLUTIONS

MILMEGA

RF/Microwave Amplifiers

The MILMEGA 'AS' Series Dual Band Class A Solid State Amplifier for Automotive Radar Pulse Testing

Model: AS0104R-800/400 Dual Band Broadband Amplifier




- More useable power
- Harmonics -20dBc even at saturation.

The AS0104R series of solid state power amplifiers follows the MILMEGA tradition for compact, upgradeable microwave power amplifier solutions with field proven reliability. Developed to cover the frequency band 1.0 - 4.0 GHz in two bands (1.0 GHz to 2.0 GHz and 2.0 GHz to 4.0 GHz).

This amplifier is specially tuned and specified in the two automotive radar bands in order to guarantee at least 800 watts of usable power in the 1.2-1.4GHz range and 400 watts in the 2.7-3.1GHz range.

Either RS232, USB and Ethernet or RS232 and GPIB remote controls can be fitted at no additional cost.

The unique 5 year parts and labour warranty on all MILMEGA amplifiers.

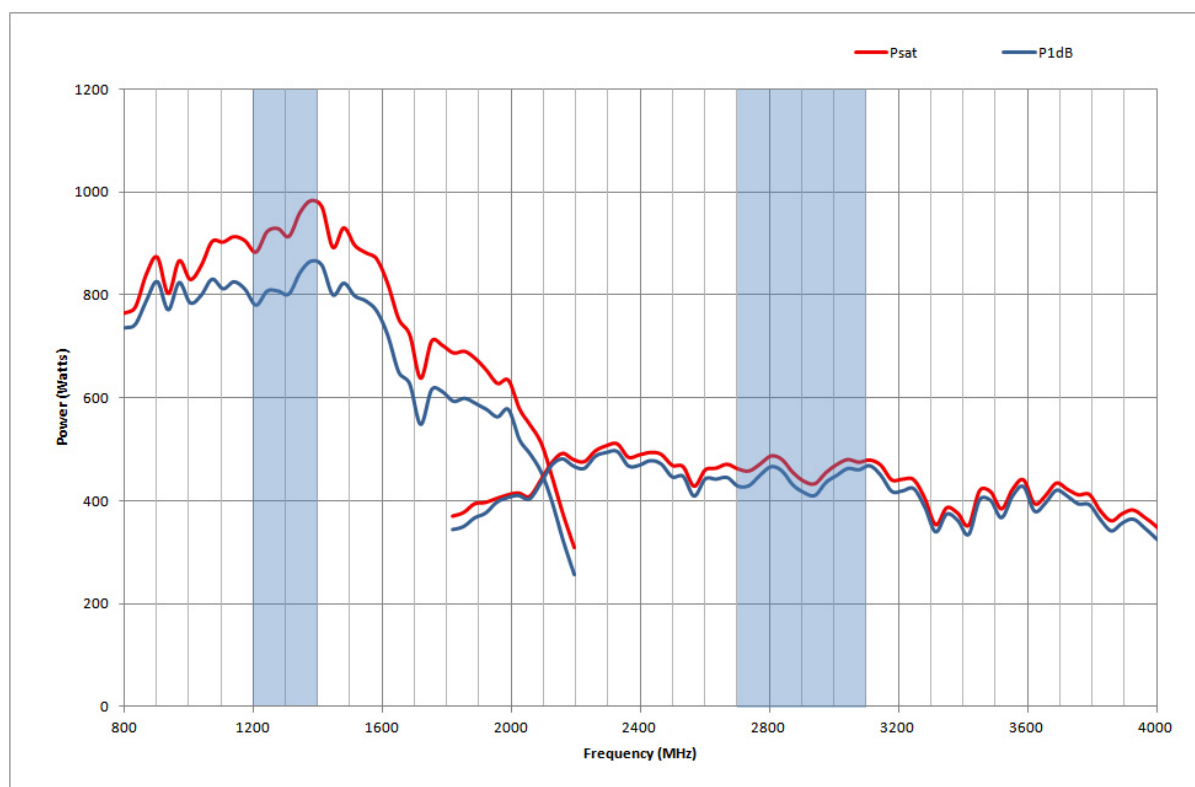

Amplifier Specification

1.2-1.4GHz	<i>Minimum Psat</i>	<i>Minimum P1dB</i>
Power (As highlighted on graph)	800 W	700 W
Gain	63.0 dB	
2.7-3.1GHz		
Power (As highlighted on graph)	400 W	350 W
Gain	60.0 dB	
1.0-2.0GHz		
Power	500 W	440 W
Gain	63.0dB	
Noise figure		6.0 dB
2.0-4.0GHz		
Power (As highlighted on graph)	350 W	300 W
Gain	60.0 dB	
Noise figure		8.0 dB
System Parameters	<i>Typical</i>	<i>Maximum</i>
Harmonics at Saturation	-20 dBc	
Gain variation with frequency	+/- 2 dB	
Gain variation with temperature	<0.06 dB/ °C	
Input Power (no damage)		+15 dBm
Output VSWR tolerance	Infinite any phase	
Stability	Unconditional	
Output impedance	50 Ohm	
Output VSWR	2:1	
Input VSWR	2:1	
Third order intercept point IP3	10dB > P1dB	
Spurious	-80 dBc	
Safety interlock	Via rear panel D-sub connector	
Supply Voltage - 3 Phase	Delta or Star	
Supply Frequency	47 to 63 Hz	
Supply Power	5.5kVA	6.7 kVA (theoretical maximum)
RF Input	Type N female	
RF Output	7/16 female	
Dimension	19 inch, 25U case, 800mm Deep	
Weight	240 kg	

Amplifiers that meet today's and tomorrow's needs through upgradability.
Amplifiers in this family include the AS0104R-280/150, AS0104R-500/300 and AS0104R-800/400 with the MILMEGA Modularity, Upgrade path and 5 Year Warranty.



Specifications subject to change without notice. MILMEGA is an ISO accredited Company. Products are designed and manufactured under strict quality and environmental requirements of ISO 9001.



RF/Microwave Amplifiers

MILMEGA Limited Park Road, Ryde, Isle of Wight PO33 2BE United Kingdom
Tel. +44 (0) 1983 618004 Fax. +44 (0) 1983 811521 sales@milmega.co.uk www.milmega.co.uk